



WWW.ASD-LIGHTING.COM

*Efficiency,
you can see!*



LED AREA LIGHT

2025

PRODUCT
PRESENTATION

LED AREA LIGHT

WWW.ASD-LIGHTING.COM



03 LED AREA LIGHT PRO LSB5B-PRO



06 LED AREA LIGHT NEOX LSB5B-NEOX



09 LED AREA LIGHT ROUND PRO LSB5R-PRO



10 ACCESSORIES MOUNTING BRACKETS



13 ACCESSORIES LENSES



14 Q-BASE MOTION SENSORS



16 REMOTE CONTROL ASD-06RC



LED AREA LIGHT

LSB5B-PRO



LSB5B WITH Q-BASE

PRO SERIES

The LED Area Light delivers 170 lm/W efficiency and up to 145,000 hours lifespan. It features a dusk-to-dawn photocell, 6kV surge protection, 0-10 V dimming, and selectable CCTs and wattages. With multiple mounts, finishes, UL/DLC Premium certification, and a 5-year warranty, the PRO Series is ideal for commercial and industrial use.

W POWER ADJUSTABLE
150-300W

3CCT COLOR SELECTABLE
3000K, 4000K, 5000K

COLOR AND POWER SELECTABLE

BUILT-IN Q-BASE
MICROWAVE OR INFRARED
SENSOR



3G 3G VIBRATION
RATING

SURGE
PROTECTION 6KV



LED AREA LIGHT

LSB5B-PRO



120-277V
voltage



200-480V
voltage



Surge
protection



0-10V
dimming



Wet
locations

LSB5BHV WITH Q-BASE

PRO SERIES

The LED Area Light delivers exceptional efficiency with 170 lumens per watt and a lifespan of up to 145,000 hours. Available in 500W and 750W models, it includes a dusk-to-dawn photocell, 10kV surge protection, and a 0-10V dimmable driver. With selectable color temperatures, adjustable wattages, multiple mounting options, and various finishes, the PRO Series suits both commercial and industrial applications. UL and DLC Premium certified, it comes with a 5-year warranty for reliable, worry-free use.



POWER ADJUSTABLE
500-750W



COLOR SELECTABLE
3000K, 4000K, 5000K



**COLOR AND POWER
SELECTABLE**



**BUILT-IN Q-BASE
MICROWAVE OR INFRARED
SENSOR**



POWER ADJUSTABLE
COLOR SELECTABLE



**3G VIBRATION
RATING**







**SURGE
PROTECTION 10KV**



LED AREA LIGHT

PRO SERIES

LSB5B-PRO-150				LSB5B-PRO-200	LSB5B-PRO-240	
						
bronze	black	silver	white	bronze	bronze	
LSB5B-PRO-300				LSB5B-PRO-500BR		
						
bronze	black	silver	white	bronze	silver	
LSB5BHV-PRO-150	LSB5BHV-PRO-200	LSB5BHV-PRO-240	LSB5BHV-PRO-300		LSB5BHV-PRO-500	LSB5BHV-PRO-750
						
bronze	bronze	bronze	bronze	silver	bronze	bronze

LED AREA LIGHT

LSB5B-NEOX



200
lm/W
SERIES
NEOX



PHOTOCELL WITH
ON-OFF SWITCH



LSB5B WITH Q-BASE

NEOX SERIES

The NEOX LED Area Light delivers 200 lm/W efficiency and up to 145,000 hours of life. It features a dusk-to-dawn photocell, 6kV surge protection, and a 0-10V dimmable driver. With selectable color temperatures, power levels, mounting options, and finishes, it suits any setting. UL and DLC Premium certified, it includes a 5-year warranty for lasting performance.

W POWER ADJUSTABLE
150-300W

3CCT COLOR SELECTABLE
3000K, 4000K, 5000K

**COLOR AND POWER
SELECTABLE**



**BUILT-IN Q-BASE
MICROWAVE OR INFRARED
SENSOR**



3G 3G VIBRATION
RATING



**SURGE
PROTECTION 6KV**



LED AREA LIGHT


LSB5B-NEOX



**200
lm/W**
NEOX
SERIES



PHOTOCELL WITH
ON-OFF SWITCH



ADAPTER ON THE FIXTURE
FOR QUICK INSTALLATION



LSB5B WITH Q-BASE

NEOX SERIES

The NEOX LED Area Light delivers 200 lm/W efficiency, 500W output, and up to 145,000 hours of life. It includes a dusk-to-dawn photocell, 6kV surge protection, and a 0-10V dimmable driver. With selectable color temperatures, power levels, mounting options, and finishes, it suits any commercial or industrial setting. UL and DLC Premium certified, it's backed by a 5-year warranty for lasting value.



POWER ADJUSTABLE
500W



COLOR SELECTABLE
3000K, 4000K, 5000K



COLOR AND POWER
SELECTABLE



BUILT-IN Q-BASE
MICROWAVE OR INFRARED
SENSOR



**3G VIBRATION
RATING**






**SURGE
PROTECTION 6KV**



LED AREA LIGHT

NEOX SERIES

LSB5B-NEOX-150				LSB5B-NEOX-200	LSB5B-NEOX-240	
						
bronze	black	silver	white	bronze	bronze	
LSB5B-NEOX-300				LSB5B-NEOX-500		
						
bronze	black	silver	white	bronze		
LSB5BHV-NEOX-150	LSB5BHV-NEOX-200	LSB5BHV-NEOX-240	LSB5BHV-NEOX-300		LSB5BHV-PRO-500	
						
bronze	bronze	bronze	bronze	white	bronze	

LED AREA ROUND LIGHT

LSB5R-PRO



PHOTOCELL WITH
ON-OFF SWITCH



**170
lm/W**
SERIES
PRO

bronze

black

FINISH



LSB5R WITH Q-BASE

PRO SERIES

Offers energy-efficient lighting with an impressive 170 lm/W output, making it perfect for outdoor areas like parks, roadways, and parking lots. Its round shape is designed for seamless post-top installation. Operating on 120-277V circuits, it features a built-in motion sensor base for easy integration with microwave or PIR sensors, along with a photocell that adjusts the lighting based on ambient light levels. Rated for vibration resistance and wet locations, this durable fixture has a lifespan of up to 163,000 hours and comes with a 5-year warranty, ensuring long-lasting reliability.

W **POWER ADJUSTABLE**
100W

3CCT **COLOR SELECTABLE**
3000K, 4000K, 5000K

 **COLOR AND POWER
SELECTABLE**

 **BUILT-IN Q-BASE
MICROWAVE OR INFRARED
SENSOR**



3G **1,5G VIBRATION
RATING**

 **SURGE
PROTECTION 10KV**



**DLC
LISTED
PREMIUM**

**UL
CERTIFIED**

**5
YEAR
WARRANTY**

ACCESSORIES FOR LSB5B 150-300W

MOUNTING BRACKETS

ASD-AM-LSB5



ARM
MOUNTING BRACKET

bronze

black

silver

white

ASD-AMR-LSB5



ADJUSTABLE ARM
MOUNTING BRACKET

bronze

black

silver

white

ASD-FM1-LSB5B (150-200W)
ASD-FM2-LSB5B (240-300W)



FLOODLIGHT
MOUNTING BRACKET

bronze

black

silver

white

ASD-SF-LSB5



SLIP FITTER
MOUNTING BRACKET

bronze

black

silver

white

ASD-TR-LSB5



FULL TRUNNION
MOUNTING BRACKET

bronze

black

silver

white

ASD-WMB-LSB



WALL MOUNTING
TENON BRACKET

bronze

ACCESSORIES FOR LSB5B 500-750W

MOUNTING BRACKETS

ASD-SF2-LSB



SLIP FITTER
MOUNTING BRACKET

bronze

black

silver

white

ASD-AMR2-LSB



ADJUSTABLE ARM
MOUNTING BRACKET

bronze

black

silver

white

ASD-FM3-LSB5B (500W)



FLOODLIGHT
MOUNTING BRACKET

bronze

black

silver

white

ASD-TR2-LSB



FULL TRUNNION
MOUNTING BRACKET

bronze

black

silver

white

ACCESSORIES

MOUNTING BRACKETS

ASD-TN



TENON
BRACKET

bronze

ASD-B2BT



DUAL BULL
TENON BRACKET

bronze

ASD-B3BT



TRIPLE BULL
TENON BRACKET

bronze

ASD-SPS-LSB5
ASD-SPS2-LSB5



SPILL
SHIELD

bronze

ASD-POST-LSB5




POST
BRACKET

bronze


black

LIGHT DISTRIBUTION OPTIONS


TYPE III (by default)

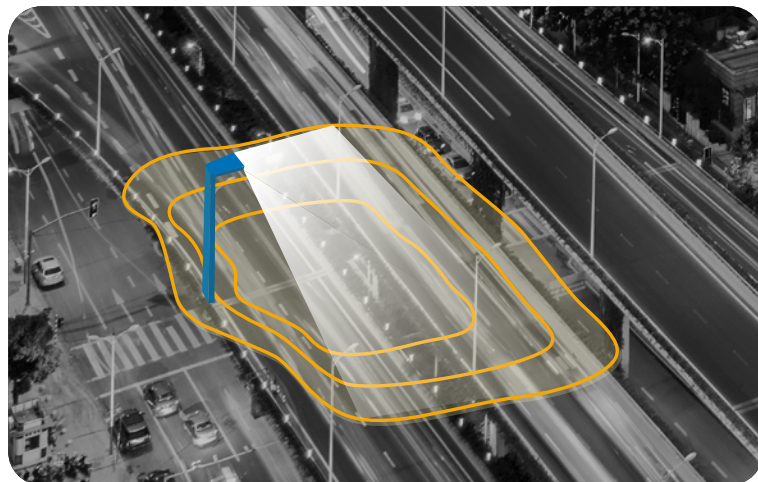

TYPE II-M (optional)

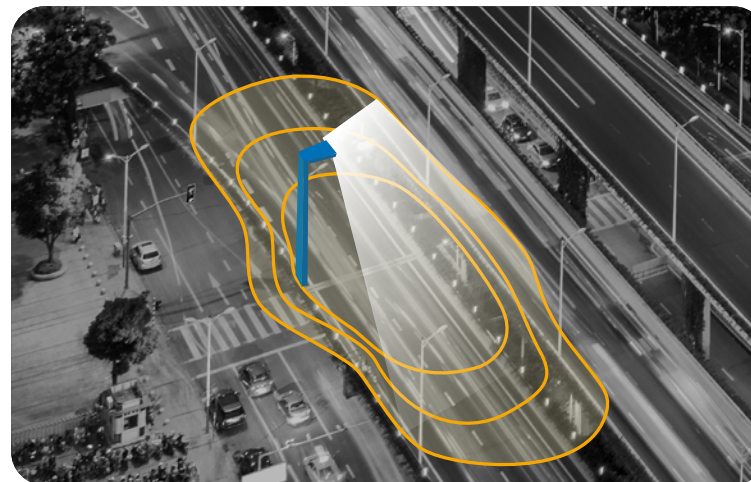


ASD-L2A-LSB5B
(150w-200w)




ASD-L2B-LSB5B
(240w-500w)

TYPE IV-S (optional)

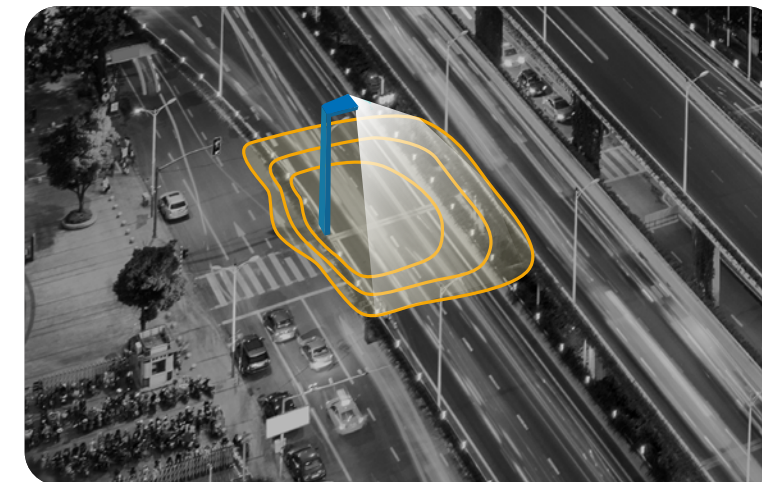


ASD-L4A-LSB5B
(150w-200w)




ASD-L4B-LSB5B
(240w-500w)

TYPE V-S (optional)

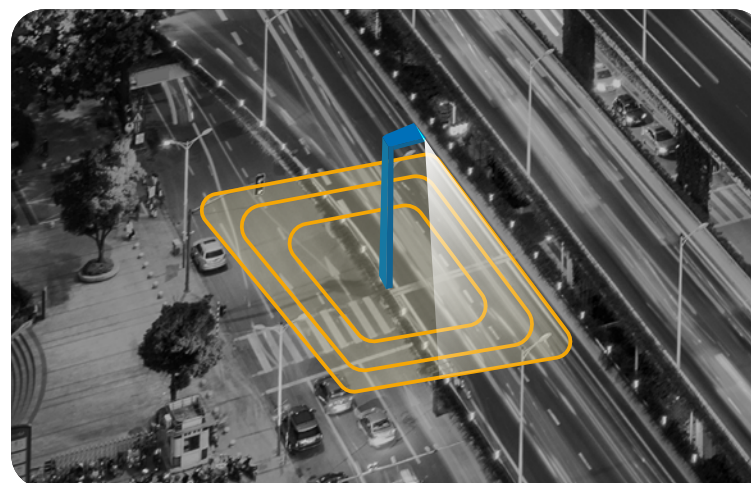


ASD-L5A-LSB5B
(150w-200w)




ASD-L5B-LSB5B
(240w-500w)

60° FLOODLIGHT (optional)

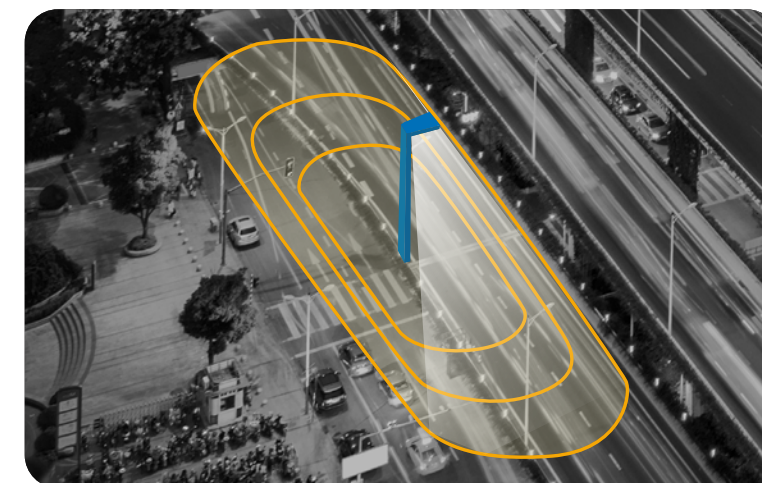


ASD-LFLA-LSB5B
(150w-200w)



ASD-LFLBB-LSB5B
(240w-500w)

Q-BASE MOTION SENSORS

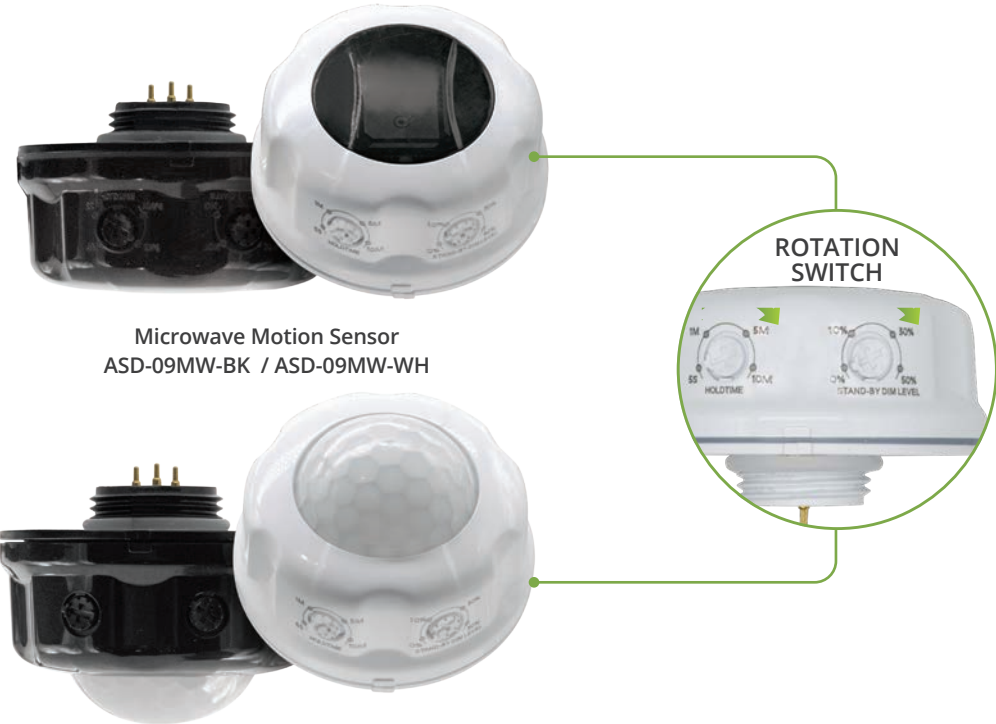

Microwave Motion Sensor
ASD-09MW-BK / ASD-09MW-WH

Infrared Motion Sensor
ASD-09IR-BK / ASD-09IR-WH



Infrared Motion Sensor
ASD-09IR50-WH

UP TO
**50
FEET**
INSTALLATION
HEIGHT

REMOTE CONTROL



ASD-06RC

Sensor with 3 pin base is ideal solution for linear and UFO high bay lights. IP65 housing ensures operation in wet locations.



ADVANCED DEVICE CONTROL





ENHANCED MOTION SENSITIVITY





PIR OR MW TECHNOLOGY OPTIONS





PLUG-AND-PLAY INSTALLATION



ADJUST SENSOR SETTINGS WITH SWITCHES

SETTINGS	ADJUSTMENT
HOLDTIME	5 s - 10 min
STAND-BY DIMMING LEVEL	0 - 50%

ADJUST SENSOR SETTINGS WITH REMOTE CONTROL

SETTINGS	ADJUSTMENT	DEFAULT
DETECTION AREA	25%-100%	100%
HOLDTIME	5 s - 120 min	10 min
DAYLIGHT THRESHOLD	2 - 400 lux	DIASBLE
STAND-BY DIMMING LEVEL	0 - 50%	10%
STAND-BY PERIOD	0 s ± ∞	0 s

REMOTE CONTROL

ASD-06RC

Auto	AUTO Enter "sensor mode" and perform previous settings
Reset	RESET Enter "sensor mode" and perform the default settings
Scenes	SCENES Shows current settings saved in remote
Start	START Press this to begin scene setup
Memory	MEMORY Saves the scene settings
Appy	APPLY Applies current scene settings to the fixture
M H	MOUNTING HEIGHT Adjust detection area/sensitivity levels according to real installation situations, higher or lower
Send	SEND Memorize and send out the previous setting of individual parameters
	DETECTION RANGE Also known as "sensitivity", 100 % means the highest sensitivity and longest distance. Use this button and the +/- buttons to adjust
	DAYLIGHT SENSOR The preset lux level at which motion will be detected. Use this button and the +/- buttons to adjust

One remote can control both types of Motion Sensor, in addition to giving you access to lighting and brightness settings, expanding the capabilities of the fixture.

	STAND-BY DIMMING After hold time, the light will dim from 100 % to optional standby dimming levels. Use this button and the +/- buttons to adjust
	HOLD TIME The period that light will stay illuminated 100 % after no motion is detected. Use this button and the +/- buttons to adjust
	STAND-BY PERIOD The period after holdtime, during which the light keeps standby dimming level. Use this button and the +/- buttons to adjust
	UP / DOWN The main functional buttons to adjust the factors to desired level. Press +/- button to dim light directly Auto in non-detection mode
CCT	CCT SELECTABLE Not applicable to this product
POWER	POWER Adjust brightness in both ON/OFF mode & sensor mode, minimum 10%, max 100%, each time this button is pressed it changes by 5%
	RESERVED BUTTON Not applicable to this product
	DAYLIGHT HARVESTING Daylight harvesting function enabled or disabled
Test	TEST BUTTON Press this button to test the sensor; it will temporarily change the hold time to 2s. This setting cannot be saved

All models have a built-in daylight sensor that automatically turns the fixture on and off depending on the ambient light level.



ASD PROVIDES LIGHTING DESIGN AND PLANNING

We deliver more than lighting — we deliver complete, intelligent solutions. From concept to construction, we partner with architects, designers, and engineers to create lighting systems that are visually striking and technically sound. Using tools like Google Maps, we add real-world context to every design, enhancing accuracy and appeal. Trust us to bring clarity, performance, and expertise to every phase of your project.

- ✓ Professional lighting design and planning
- ✓ Expert fixture selection and specification
- ✓ Customized solutions tailored to your space and goals



LED AREA LIGHT

LSB5B PRO/LSB5R PRO

LSB5B PRO/LSB5R PRO



MODEL	POWER (WATT)	VOLTAGE (VOLT)	TYPE OF DIMMING	LUMINOUS FLUX (LM)	COLOR TEMPERATURE (KELVIN)	FINISH	DIMENSIONS (L x W x H)	CERTIFICATION	LOCATION	IP	CM SURGE PROTECTION (KV)	QTY IN INDIVIDUAL BOX	UPC
ASD-LSB5B-PRO-150BR	100/120/150	120-277	0-10V	17388/20520/24141	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811604
ASD-LSB5B-PRO-150BK	100/120/150	120-277	0-10V	17388/20520/24141	3000/4000/5000	Black	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811871
ASD-LSB5B-PRO-150SL	100/120/150	120-277	0-10V	17388/20520/24141	3000/4000/5000	Silver	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811835
ASD-LSB5B-PRO-150WH	100/120/150	120-277	0-10V	17388/20520/24141	3000/4000/5000	White	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811873
ASD-LSB5BHV-PRO-150BR	100/120/150	200-480	0-10V	18616/20446/24436	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	10	1	81012811608
ASD-LSB5B-PRO-200BR	100/150/200	120-277	0-10V	18135/25516/33273	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811605
ASD-LSB5BHV-PRO-200BR	100/150/200	200-480	0-10V	18135/25950/34052	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	10	1	81012811689
ASD-LSB5B-PRO-240BR	150/200/240	120-277	0-10V	26433/33619/39419	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811606
ASD-LSB5BHV-PRO-240BR	150/200/240	200-480	0-10V	26225/34806/40224	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811609
ASD-LSB5B-PRO-300BR	200/240/300	120-277	0-10V	37051/42765/51005	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811607
ASD-LSB5B-PRO-300BK	200/240/300	120-277	0-10V	37051/42765/51005	3000/4000/5000	Black	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811880
ASD-LSB5B-PRO-300SL	200/240/300	120-277	0-10V	37051/42765/51005	3000/4000/5000	Silver	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811881
ASD-LSB5B-PRO-300WH	200/240/300	120-277	0-10V	37051/42765/51005	3000/4000/5000	White	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811882
ASD-LSB5BHV-PRO-300BR	200/240/300	200-480	0-10V	35098/40923/51208	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811610
ASD-LSB5BHV-PRO-300SL	200/240/300	200-480	0-10V	35098/40923/51208	3000/4000/5000	Silver	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811612
ASD-LSB5B-PRO-500BR	300/400/500	120-277	0-10V	54658/69521/83326	3000/4000/5000	Bronze	29 7/16 x 12 3/16 x 2 3/4	UL, DLC Premium	Wet	IP65	6	1	81012811688
ASD-LSB5B-PRO-500SL	300/400/500	120-277	0-10V	54658/69521/83326	3000/4000/5000	Silver	29 7/16 x 12 3/16 x 2 3/4	UL, DLC Premium	Wet	IP65	6	1	81019020119
ASD-LSB5BHV-PRO-500BR	300/400/500	200-480	0-10V	55323/70404/83851	3000/4000/5000	Bronze	29 7/16 x 12 3/16 x 2 3/4	UL, DLC Premium	Wet	IP65	10	1	81012811690
ASD-LSB5BHV-PRO-750BR	500/600/750	200-480	0-10V	84316/102963/120549	3000/4000/5000	Bronze	33 1/16 x 14 9/16 x 3 9/16	UL, DLC Premium	Wet	IP65	10	1	81019020057
ASD-LSB5R-PRO-100BR	35/55/75/100	120-277	0-10V	6467/9450/12176/15223	3000/4000/5000	Bronze	11 1/2 x 11 7/16 x 2 5/8	UL, DLC Premium	Wet	IP65	10	1	81019020058
ASD-LSB5R-PRO-100BK	35/55/75/100	120-277	0-10V	6467/9450/12176/15223	3000/4000/5000	Black	11 1/2 x 11 7/16 x 2 5/8	UL, DLC Premium	Wet	IP65	10	1	81019020055
ASD-LSB5R-PRO-100BK-POST	35/55/75/100	120-277	0-10V	6467/9450/12176/15223	3000/4000/5000	Black	11 1/2 x 12 9/16 x 18 3/4	UL, DLC Premium	Wet	IP65	10	1	81012811766

LED AREA LIGHT

LSB5B NEOX




ASD-LSB5B-NEOX-150BR
ASD-LSB5B-NEOX-200BR
ASD-LSB5BHV-NEOX-150BR
ASD-LSB5BHV-NEOX-200BR



ASD-LSB5B-NEOX-150BK



ASD-LSB5B-NEOX-150SL



ASD-LSB5B-NEOX-150WH



ASD-LSB5B-NEOX-240BR
ASD-LSB5B-NEOX-300BR
ASD-LSB5BHV-NEOX-240BR
ASD-LSB5BHV-NEOX-300BR



ASD-LSB5B-NEOX-300BK



ASD-LSB5B-NEOX-300SL



ASD-LSB5B-NEOX-300WH
ASD-LSB5BHV-NEOX-300WH



ASD-LSB5B-NEOX-500BR
ASD-LSB5BHV-NEOX-500BR

LSB5B NEOX

MODEL	POWER (WATT)	VOLTAGE (VOLT)	TYPE OF DIMMING	LUMINOUS FLUX (LM)	COLOR TEMPERATURE (KELVIN)	FINISH	DIMENSIONS (L x W x H)	CERTIFICATION	LOCATION	IP	CM SURGE PROTECTION (KV)	QTY IN INDIVIDUAL BOX	UPC
ASD-LSB5B-NEOX-150BR	100/120/150	120-277	0-10V	19049/22686/27933	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811981
ASD-LSB5B-NEOX-150BK	100/120/150	120-277	0-10V	19049/22686/27933	3000/4000/5000	Black	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811984
ASD-LSB5B-NEOX-150SL	100/120/150	120-277	0-10V	19049/22686/27933	3000/4000/5000	Silver	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811985
ASD-LSB5B-NEOX-150WH	100/120/150	120-277	0-10V	19049/22686/27933	3000/4000/5000	White	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811986
ASD-LSB5BHV-NEOX-150BR	100/120/150	200-480	0-10V	19011/22732/27901	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	10	1	81012811951
ASD-LSB5B-NEOX-200BR	100/150/200	120-277	0-10V	19030/27725/36837	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	6	1	81012811982
ASD-LSB5BHV-NEOX-200BR	100/150/200	200-480	0-10V	19087/27713/37446	3000/4000/5000	Bronze	12 5/16 x 11 5/16 x 2 7/16	UL, DLC Premium	Wet	IP65	10	1	81012811979
ASD-LSB5B-NEOX-240BR	150/200/240	120-277	0-10V	28279/36292/44202	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811983
ASD-LSB5BHV-NEOX-240BR	150/200/240	200-480	0-10V	28364/37418/44132	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811952
ASD-LSB5B-NEOX-300BR	200/240/300	120-277	0-10V	37720/45758/56362	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811954
ASD-LSB5B-NEOX-300BK	200/240/300	120-277	0-10V	37720/45758/56362	3000/4000/5000	Black	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811987
ASD-LSB5B-NEOX-300SL	200/240/300	120-277	0-10V	37720/45758/56362	3000/4000/5000	Silver	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811988
ASD-LSB5B-NEOX-300WH	200/240/300	120-277	0-10V	37720/45758/56362	3000/4000/5000	White	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	6	1	81012811989
ASD-LSB5BHV-NEOX-300BR	200/240/300	200-480	0-10V	37750/45730/56088	3000/4000/5000	Bronze	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811953
ASD-LSB5BHV-NEOX-300WH	200/240/300	200-480	0-10V	37750/45730/56088	3000/4000/5000	White	16 9/16 x 12 3/16 x 2 1/2	UL, DLC Premium	Wet	IP65	10	1	81012811980
ASD-LSB5B-NEOX-500BR	300/400/500	120-277	0-10V	54888/72859/91874	3000/4000/5000	Bronze	29 7/16 x 12 3/16 x 2 3/4	UL, DLC Premium	Wet	IP65	10	1	81012811955
ASD-LSB5BHV-NEOX-500BR	300/400/500	200-480	0-10V	55442/73595/90423	3000/4000/5000	Bronze	29 7/16 x 12 3/16 x 2 3/4	UL, DLC Premium	Wet	IP65	10	1	81019020056

LED AREA LIGHT ACCESSORIES



ASD-AM-LSB5-BK



ASD-AM-LSB5-BR



ASD-AM-LSB5-SL



ASD-AM-LSB5-WH



ASD-AMR-LSB5-BK



ASD-AMR-LSB5-BR



ASD-AMR-LSB5-SL



ASD-AMR-LSB5-WH



ASD-FM1-LSB5B-BK



ASD-FM1-LSB5B-BR



ASD-FM1-LSB5B-SL



ASD-FM1-LSB5B-WH

ACCESSORIES

ACCESSORIES	MODEL	POWER OF THE FIXTURE	FINISH	L	W	H	QTY IN INDIVIDUAL BOX	GTIN (INDIVIDUAL BOX)	GTIN (MOTHER BOX)
ARM MOUNTING BRACKET	ASD-AM-LSB5-BR	100-300W	Bronze	6 13/16	6 1/4	2 5/16	1	810128116206	10810128116203
	ASD-AM-LSB5-BK	100-300W	Black	6 13/16	6 1/4	2 5/16	1	810128118453	10810128118450
	ASD-AM-LSB5-SL	100-300W	Silver	6 13/16	6 1/4	2 5/16	1	810128118460	10810128118467
	ASD-AM-LSB5-WH	100-300W	Black	6 13/16	6 1/4	2 5/16	1	810128118477	10810128118474
ADJUSTABLE ARM MOUNTING BRACKET	ASD-AMR-LSB5-BR	100-300W	Bronze	7 1/4	4 15/16	6 1/4	1	810128112246	20810128112240
	ASD-AMR-LSB5-BK	100-300W	Black	7 1/4	4 15/16	6 1/4	1	810128112239	20810128112233
	ASD-AMR-LSB5-SL	100-300W	Silver	8 5/16	6 1/4	4 15/16	1	810128112253	20810128112257
	ASD-AMR-LSB5-WH	100-300W	White	7 1/4	4 15/16	6 1/4	1	810128113298	10810128113295
	ASD-AMR2-LSB-BR	500-750W	Bronze	9 5/8	6 1/4	4 5/16	1	810128113328	10810128113325
	ASD-AMR2-LSB-BK	500-750W	Black	9 5/8	6 1/4	4 5/16	1	810128113311	10810128113318
	ASD-AMR2-LSB-SL	500-750W	Silver	10 7/16	6 1/4	3 3/4	1	810128113335	10810128113332
	ASD-AMR2-LSB-WH	500-750W	White	9 5/8	6 1/4	4 5/16	1	810128114011	10810128114018
FLOODLIGHT MOUNTING BRACKET	ASD-FM1-LSB5B-BR	150-200W	Bronze	11 7/16	6 5/16	9 7/8	1	810128116718	10810128116715
	ASD-FM1-LSB5B-BK	150-200W	Black	11 7/16	6 5/16	9 7/8	1	810128118385	10810128118382
	ASD-FM1-LSB5B-SL	150-200W	Silver	11 7/16	6 5/16	9 7/8	1	810128116725	10810128116722
	ASD-FM1-LSB5B-WH	150-200W	White	11 7/16	6 5/16	9 7/8	1	810128118392	10810128118399
	ASD-FM2-LSB5B-BR	240-300W	Bronze	12 9/16	6 1/16	9 5/16	1	810128116732	10810128116739
	ASD-FM2-LSB5B-BK	240-300W	Black	12 9/16	6 1/16	9 5/16	1	810128118408	10810128118405
	ASD-FM2-LSB5B-SL	240-300W	Silver	12 9/16	6 1/16	9 5/16	1	810128116749	10810128116746
	ASD-FM2-LSB5B-WH	240-300W	White	12 9/16	6 1/16	9 5/16	1	810128118415	10810128118412
	ASD-FM3-LSB5B-BR	500W	Bronze	12 11/16	7 1/2	12 3/8	1	810128116756	10810128116753
	ASD-FM3-LSB5B-BK	500W	Black	12 11/16	7 1/2	12 3/8	1	810128118439	10810128118436
	ASD-FM3-LSB5B-SL	500W	Silver	12 11/16	7 1/2	12 3/8	1	810128118422	10810128118429
	ASD-FM3-LSB5B-WH	500W	White	12 11/16	7 1/2	12 3/8	1	810128118446	10810128118443


LED AREA LIGHT ACCESSORIES



ACCESSORIES

ACCESSORIES	MODEL	POWER OF THE FIXTURE	FINISH	L	W	H	QTY IN INDIVIDUAL BOX	GTIN (INDIVIDUAL BOX)	GTIN (MOTHER BOX)
FULL TRUNNION MOUNTING BRACKET	ASD-TR-LSB5-BR	100-300W	Bronze	5 13/16	4 3/4	1 3/4	1	810128111058	10810128111055
	ASD-TR2-LSB-BK	100-300W	Black	7 1/16	5 7/8	2 11/16	1	810128114264	10810128114261
	ASD-TR-LSB5-SL	100-300W	Silver	6 9/16	4 7/16	1 7/8	1	810128111997	10810128111994
	ASD-TR-LSB5-WH	100-300W	White	6 9/16	4 7/16	1 7/8	1	810128113434	10810128113431
	ASD-TR2-LSB-BR	500-750W	Bronze	7 1/16	5 7/8	2 11/16	1	810128114271	10810128114278
	ASD-TR-LSB5-BK	500-750W	Black	6 9/16	4 7/16	1 7/8	1	810128111980	10810128111987
	ASD-TR2-LSB-SL	500-750W	Silver	7 1/16	5 7/8	2 11/16	1	810128114288	10810128114285
	ASD-TR2-LSB-WH	500-750W	White	7 1/16	5 7/8	2 11/16	1	810128114295	10810128114292
SLIP FITTER MOUNTING BRACKET	ASD-SF-LSB5-BR	100-300W	Bronze	7 9/16	4 15/16	2 7/8	1	810128111041	10810128111048
	ASD-SF-LSB5-BK	100-300W	Black	7 1/16	4 15/16	3 1/16	1	810128111966	
	ASD-SF-LSB5-SL	100-300W	Silver	7 1/16	4 15/16	3 1/16	1	810128111973	
	ASD-SF-LSB5-WH	100-300W	White	7 9/16	4 15/16	2 7/8	1	810128113304	20810128113308
	ASD-SF2-LSB-BR	500-750W	Bronze	10 11/16	4 5/16	3 3/8	1	810128114233	10810128114230
	ASD-SF2-LSB-BK	500-750W	Black	10 11/16	4 5/16	3 3/8	1	810128114226	10810128114223
	ASD-SF2-LSB-SL	500-750W	Silver	10 11/16	4 5/16	3 3/8	1	810128114240	10810128114247
	ASD-SF2-LSB-WH	500-750W	White	10 11/16	4 5/16	3 3/8	1	810128114257	10810128114254
POST MOUNTING BRACKET	ASD-POST-LSB5-BR	100W	Bronze	8 3/4	18 1/4	4 15/16	1	810190200582	10810190200589
	ASD-POST-LSB5	100W	Black	8 3/4	18 1/4	4 15/16	1	810128117661	10810128117668

LED AREA LIGHT ACCESSORIES

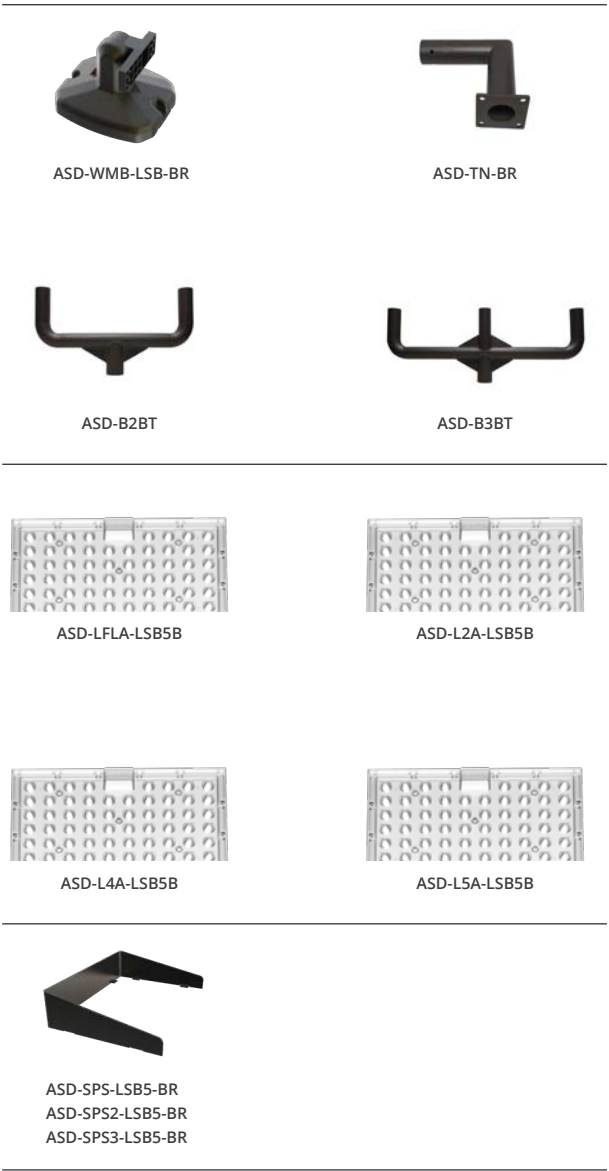

ACCESSORIES

ACCESSORIES	MODEL	POWER OF THE FIXTURE	FINISH	L	W	H	QTY IN INDIVIDUAL BOX	GTIN (INDIVIDUAL BOX)	GTIN (MOTHER BOX)
WALL MOUNTING BRACKET	ASD-WMB-LSB-BR	150-300W	Bronze	7 3/16	6 1/4	3 5/16	1	810128118484	10810128118481
TENON BRACKET	ASD-TN-BR	150-300W	Bronze	9 7/16	3 15/16	8 11/16	1	810128116800	10810128116807
	ASD-B2BT	150-300W	Bronze	36	15 7/8	2 15/16	1	810128117876	
	ASD-B3BT	150-300W	Bronze	37 13/16	14 3/16	2 3/4	1	810128117883	
LENSES	ASD-LFLA-LSB5B	150-200W	Clear	10 9/16	5 7/8	1/2	1	810128116190	10810128116197
	ASD-LFLB-LSB5B	240-500W	Clear	11 7/8	8 1/4	7/16	1	810128116879	10810128116876
	ASD-L2A-LSB5B	150-200W	Clear	10 9/16	5 7/8	1/2	1	810128116138	10810128116135
	ASD-L2B-LSB5B	240-500W	Clear	11 7/8	8 1/4	7/16	1	810128116145	10810128116142
	ASD-L4A-LSB5B	150-200W	Clear	10 9/16	5 7/8	1/2	1	810128116152	10810128116159
	ASD-L4B-LSB5B	240-500W	Clear	11 7/8	8 1/4	7/16	1	810128116169	10810128116166
	ASD-L5A-LSB5B	150-200W	Clear	10 9/16	5 7/8	1/2	1	810128116176	10810128116173
	ASD-L5B-LSB5B	240-500W	Clear	11 7/8	8 1/4	7/16	1	810128116183	10810128116180
CUTOFF SHIELD	ASD-SPS-LSB5-BR	150-200W	Bronze	11	5 7/8	2 3/4	1	810128117845	10810128117842
	ASD-SPS2-LSB5-BR	240-300W	Bronze	11 15/16	8 1/2	2 3/4	1	810128117852	10810128117859
	ASD-SPS3-LSB5-BR	500W	Bronze	15 3/4	11 15/16	4 3/4	1	00810190201756	10810190201753

Q-BASE

MOTION SENSORS

MOTION SENSORS

SENSOR	MODEL	APPLICABLE MODELS	IMPUT VOLTAGE	FINISH	DIMENSIONS LXWXH	PCS. PER CARTON
INFRARED MOTION SENSOR	ASD-09IR-BK	UHB2A all models, UHB2A -PRO all models, WHB5B all models, WHB5A-PRO all models	12V	Black	2-1/8" × 2-1/8" × 1-11/16"	120
	ASD-09IR-WH		12V	White	2-1/8" × 2-1/8" × 1-11/16"	120
	ASD-09IR50-WH		12V	White	2-1/8" × 2-1/8" × 1-11/16"	120
MICROWAVE MOTION SENSOR	ASD-09MW-BK		12V	Black	2-1/8" × 2-1/8" × 1-11/16"	120
	ASD-09MW-WH		12V	White	2-1/8" × 2-1/8" × 1-11/16"	120
REMOTE CONTROL FOR MOTION SENSOR	ASD-06RC		-	-	5-11/16" × 1-3/4" × 13/16"	60

Infrared Motion Sensors



ASD-09IR-BK



ASD-09IR-WH



ASD-09IR50-WH

Microwave Motion Sensors



ASD-09IR-BK



ASD-09IR-WH

Remote Control for Motion Sensor



ASD-06RC



ASD LIGHTING CORP

ASD Lighting Corp has become one of the leading LED lighting brands in the United States for commercial and residential applications.



QUALITY

For the production of ASD Luminaires we carefully choose the highest quality components to ensure efficiency and longevity.



LOGISTICS

We are constantly improving our warehouse system so that delivery and storage of ASD products is not only efficient, but also fast and convenient.



*New Standard
in Lighting!*