



Project: \_\_\_\_\_

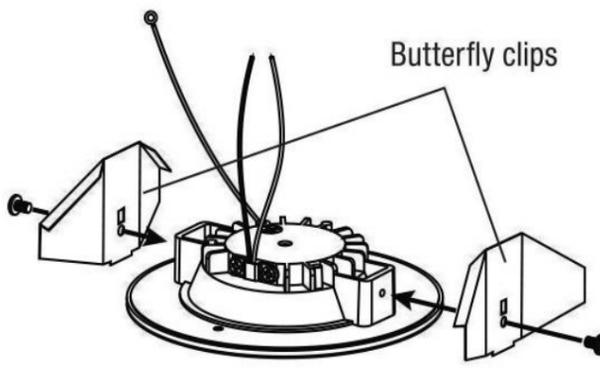
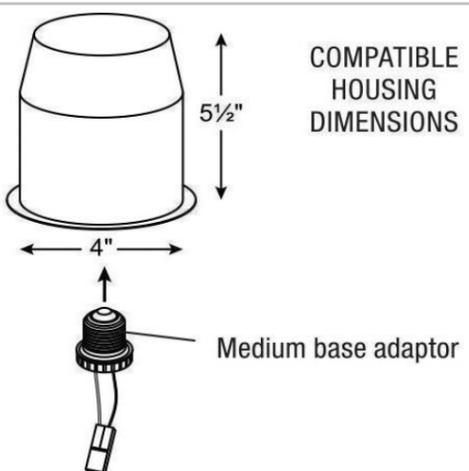
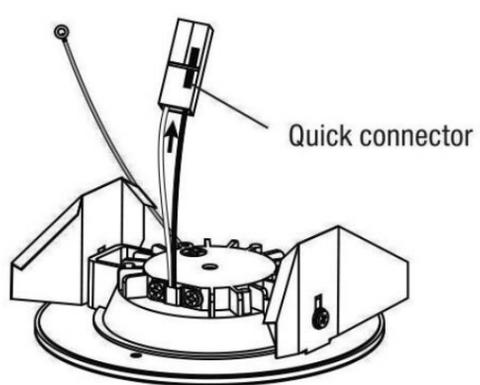
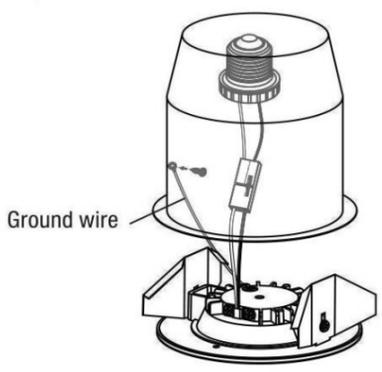

Location: \_\_\_\_\_

Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

#### Retrofit Kit with E26 Adapter and Butterfly Clips for model LED-S8W

#### INSTALLATION INSTRUCTIONS

<p>1. Secure the butterfly clips to the luminaire with the two screws provided.</p> 	<p>2. Secure the medium based adapter into socket in recessed housing.</p>  <p>COMPATIBLE HOUSING DIMENSIONS</p>
<p>3. Insert the wires from the luminaire to the quick connector. Connect the live (black) wire to the marked slot of the quick connector.</p> 	<p>4. Connect the ground wire (yellow-green) by securing the terminal ring to the recessed housing using the provided self tapping screw. Use 1/8" drill bit to drill hole on the recessed housing. Plug in the male and female parts of the connector. Squeeze the butterfly clips and install the luminaire in recessed housing</p> 
<p>5. Center the luminaire in recessed housing. Install the trim ring by placing the metal side towards the luminaire. The magnets on the luminaire will secure the trim ring in place.</p> 	

#### ORDERING GUIDE

model # **RK-4M**

#### COMPATIBLE FIXTURES

- LED-S8W-3K
- LED-S8W-4K