


LED Canless Downlight

DATE: _____ LOCATION: _____
TYPE: _____ PROJECT: _____
CONSTRUCTION: _____



**IC
RATED**

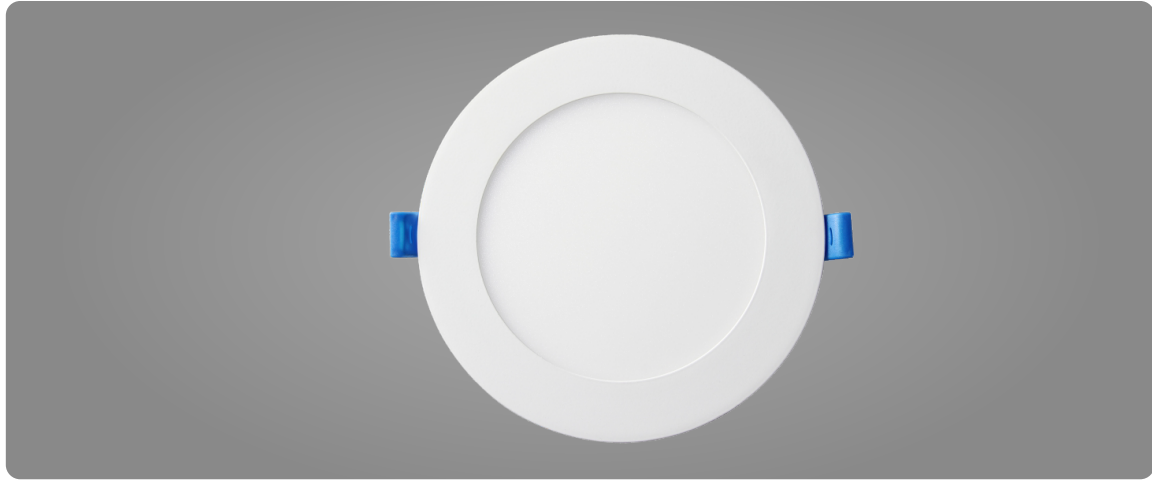

**DAMP
LOCATIONS**



PERFORMANCE FEATURES

CETLUS Rated

Suitable for Damp locations

Energy Star Rated

5 Color Temperature Selectable

2700K - 5000K

Dimming

Seamless and smooth dimming capabilities from 10% to 100% that fit any mood or decor

Installation Methods

Surface Mount & E26 Retrofit Can Installation

Application

Closets, hallways, bedrooms, offices, utility work areas, and many other places.


SKU GUIDE

Model Section		DLR4-9W-CCT-DV1-F-WH					
DLR4		9W	CCT	DV1		F	WH
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH
DLR	4 - 4 inch 6 - 6 inch	9W 12W	CCT - 5 CCT Selectable (2700K-5000K)	D - Triac Dimming	V1 - 120V	F-Frosted Lens	WH- White Finish

SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
DLR4-9W-CCT-DV1-NA-F-WH	9W	2700K 3000K 3500K 4000K 5000K	700	70	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated
DLR6-12W-CCT-DV1-NA-F-WH	12W	2700K 3000K 3500K 4000K 5000K	1000	77	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated

PRODUCT DIMENSIONS

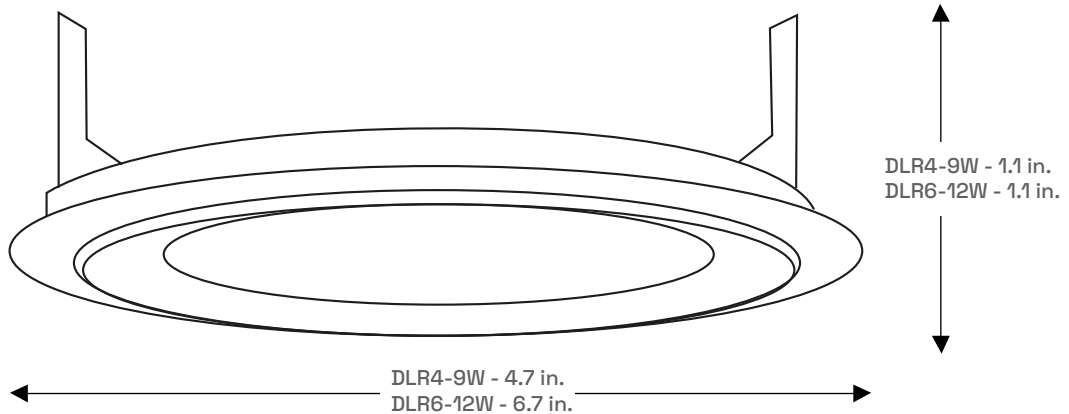

PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	W/D
DLR4-9W-CCT-DV1-NA-F-WH	1 Pack	L 5.2in x W 2.6in x H 5.2in	40 Pack	L 21.6 in x W 12.5in x H 11.2in
DLR6-12W-CCT-DV1-NA-F-WH	1 Pack	L 7.0in x W 7.0in x H 2.0in	30 Pack	L 21.8 in x W 10.6in x H 14.7in

INSTALLATION

