



LED DOUBLE RING FLUSHMOUNT

LFMDR series

► **DESIGN** - LED DOUBLE RING FLUSHMOUNT has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact along with an acrylic lens provide many years of use. Smooth triac dimming capabilities from 10% to 100% with modern LED dimmers gives you full control over your space.

► **VARIETY** - Available in round or oval shapes, this fixture comes in 10", 12", 14", 16", 18", 24", and 32" sizes. Choose from 120V or 120-277V options and finishes in Bronze, Black, or Nickel.

► **COLOR SELECTABLE** - You can choose either a 2700K soft white, 3000K warm white, 3500K neutral white, 4000K cool white, or 5000K daylight color temperature.

► **APPLICATION** - The LED DOUBLE RING FLUSHMOUNT delivers bright, smooth lighting for family rooms, bedrooms, hallways, corridors, and other common areas. Compatible with 2.75" and 3.5" mounting holes for versatile installation. Damp Location rated for added durability.

► **ADVANTAGES** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL certifications to guarantee top quality products and safety!

► OPTIONS:

► **MODELS WITH BATTERY BACK-UP** - The built-in battery back-up provides 90 minutes of power in case of emergency.

► **MODELS WITH SMART RGBW** - Featuring RGBW technology, this fixture offers full control via the ASD SMART APP or remote controller. Choose from Red, Green, Blue, White (2700K-6500K), or create combinations with up to 16.7 million colors. Customize lighting patterns, set schedules, and enjoy stunning effects. Easily controlled through your smartphone, it's also compatible with Alexa and Google Assistant.



Finish: Nickel Bronze Black



Double Ring Flushmount (LFMDR)



Double Ring Flushmount Oval (FMOV)

PRODUCT PRESENTATION:

Model	Size	Power	Voltage	Dimming	Lumens	CCT	Finish	Dimensions	Battery back-up	Certification
LFMDR 120V										
ASD-LFMDR-10D16CC-NK	10 inch	16 W	120 V	Triac	1,041lm	3,000/4,000/5,000K	Nickel	10-5/16" x 10-5/16" x 3-1/2"	-	ETL (4001256)
ASD-LFMDR-10D16CC-BK	10 inch	16 W	120 V	Triac	1,041lm	3,000/4,000/5,000K	Black	10-5/16" x 10-5/16" x 3-1/2"	-	ETL (4001256)
ASD-LFMDR-12D20CC-NK	12 inch	20 W	120 V	Triac	1,473lm	3,000/4,000/5,000K	Nickel	11-13/16" x 11-13/16" x 2-9/16"	-	ETL (5029309), T24, JA8
ASD-LFMDR-12D20CC-BK	12 inch	20 W	120 V	Triac	1,473lm	3,000/4,000/5,000K	Black	11-13/16" x 11-13/16" x 2-9/16"	-	ETL (5029309), T24, JA8
ASD-LFMDR-14D21CC-NK	14 inch	21 W	120 V	Triac	1,520lm	3,000/4,000/5,000K	Nickel	13-3/4" x 13-3/4" x 2-9/16"	-	ETL (5029309), T24, JA8
ASD-LFMDR-14D21CC-BK	14 inch	21 W	120 V	Triac	1,520lm	3,000/4,000/5,000K	Black	13-3/4" x 13-3/4" x 2-9/16"	-	ETL (5029309), T24, JA8
ASD-LFMDR-16D24CC-NK	16 inch	24 W	120 V	Triac	2,291lm	3,000/4,000/5,000K	Nickel	15-15/16" x 15-15/16" x 3-1/4"	-	ETL (5029883)
ASD-LFMDR-16D24CC-BZ	16 inch	24 W	120 V	Triac	2,291lm	3,000/4,000/5,000K	Bronze	15-15/16" x 15-15/16" x 3-1/4"	-	ETL (5029883)
ASD-LFMDR-16D24CC-BK	16 inch	24 W	120 V	Triac	1,854lm	3,000/4,000/5,000K	Black	15-3/4" x 15-3/4" x 3-3/4"	-	ETL (4001256)
ASD-LFMDR-18D28CC-NK	18 inch	28 W	120 V	Triac	2,390lm	3,000/4,000/5,000K	Nickel	17-15/16" x 17-15/16" x 3-7/8"	-	ETL (5029883)
ASD-LFMDR-18D28CC-BZ	18 inch	28 W	120 V	Triac	2,390lm	3,000/4,000/5,000K	Bronze	17-15/16" x 17-15/16" x 3-7/8"	-	ETL (5029883)
ASD-LFMDR-18D28CC-BK	18 inch	28 W	120 V	Triac	2,230lm	3,000/4,000/5,000K	Black	17-11/16" x 17-11/16" x 4-1/16"	-	ETL (4001256)
LFMDR-MV 120-277V										
ASD-LFMDR-MV-12D20CC-NK	12 inch	20 W	120-277 V	Triac	1,580lm	3,000/4,000/5,000K	Nickel	11-13/16" x 11-13/16" x 3-1/8"	-	ETL (4001256)
ASD-LFMDR-MV-14D21CC-NK	14 inch	21 W	120-277 V	Triac	1,725lm	3,000/4,000/5,000K	Nickel	14" x 14" x 3-9/16"	-	ETL (4001256)
ASD-LFMDR-MV-16D24CC-NK	16 inch	24 W	120-277 V	Triac	2,118lm	3,000/4,000/5,000K	Nickel	15-3/4" x 15-3/4" x 3-13/16"	-	ETL (4001256)
ASD-LFMDR-MV-18D28CC-NK	18 inch	28 W	120-277 V	Triac	2,744lm	3,000/4,000/5,000K	Nickel	17-11/16" x 17-11/16" x 4-1/16"	-	ETL (4001256)
LFMDR-EM WITH BATTERY BACK-UP 120-277V										
ASD-LFMDR-MV-12D20CC-EM-NK	12 inch	20 W	120-277 V	Triac	1,944lm	3,000/4,000/5,000K	Nickel	11-13/16" x 11-13/16" x 4-5/16"	12W Battery Back-up	ETL (4001256)
ASD-LFMDR-MV-14D21CC-EM-NK	14 inch	21 W	120-277 V	Triac	1,854lm	3,000/4,000/5,000K	Nickel	13-3/4" x 13-3/4" x 4-11/16"	12W Battery Back-up	ETL (4001256)
ASD-LFMDR-MV-16D24CC-EM-NK	16 inch	24 W	120-277 V	Triac	2,116lm	3,000/4,000/5,000K	Nickel	15-3/4" x 15-3/4" x 4-3/4"	12W Battery Back-up	ETL (4001256)
FMOV 120V										
ASD-FMOV-24D38NK	24 inch	38 W	120 V	Triac	3,289lm	2,700/3,000/3,500/4,000/5,000K	Nickel	24" x 13-9/16" x 4-5/16"	-	ETL (5026992)
ASD-FMOV-24D38BK	24 inch	38 W	120 V	Triac	2,432lm	2,700/3,000/3,500/4,000/5,000K	Black	24" x 13-9/16" x 4-5/16"	-	ETL (5026992)
ASD-FMOV-32D50NK	32 inch	50 W	120 V	Triac	4,195lm	2,700/3,000/3,500/4,000/5,000K	Nickel	32-5/16" x 18-1/8" x 4-5/16"	-	ETL (5026992)

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED DOUBLE RING FLUSHMOUNT

LFMDR series

Model	Size	Power	Voltage	Dimming	Lumens	CCT	Finish	Dimensions	Battery back-up	Certification
ASD-FMOV-32D50BZ	32 inch	50 W	120 V	Triac	4,195lm	2,700/3,000/3,500/4,000/5,000K	Bronze	32-5/16" x 18-1/8" x 4-5/16"	-	ETL (5029883)
ASD-FMOV-32D50BK	32 inch	50 W	120 V	Triac	4,195lm	2,700/3,000/3,500/4,000/5,000K	Black	32-5/16" x 18-1/8" x 4-5/16"	-	ETL (5026992)
LFMOV-MV 120-277										
ASD-LFMOV-MV-32D45CC-NK	32 inch	45 W	120-277 V	Triac	3,750lm	3,000/4,000/5,000K	Nickel	32-7/16" x 18-1/8" x 4-13/16"	-	ETL (4001256)
ASD-LFMOV-MV-32D45CC-BZ	32 inch	45 W	120-277 V	Triac	3,750lm	3,000/4,000/5,000K	Bronze	32-7/16" x 18-1/8" x 4-13/16"	-	ETL (4001256)
ASD-LFMOV-MV-32D45CC-BK	32 inch	45 W	120-277 V	Triac	3,750lm	3,000/4,000/5,000K	Black	32-7/16" x 18-1/8" x 4-13/16"	-	ETL (4001256)

TECHNICAL PARAMETERS:


Model	Work environment	Operating temperature	Power factor	Beam angle	Surge protection	Housing	Lens	CRI
LFMDR 120								
ASD-LFMDR-10D16CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-10D16CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-12D20CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	100°	1 kV	Steel	Acrylic	> 90
ASD-LFMDR-12D20CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	100°	1 kV	Steel	Acrylic	> 90
ASD-LFMDR-14D21CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	100°	1 kV	Steel	Acrylic	> 90
ASD-LFMDR-14D21CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	100°	1 kV	Steel	Acrylic	> 90
ASD-LFMDR-16D24CC-NK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	2 kV	Steel	Acrylic	> 90
ASD-LFMDR-16D24CC-BZ	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	2 kV	Steel	Acrylic	> 90
ASD-LFMDR-16D24CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 90
ASD-LFMDR-18D28CC-NK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	2 kV	Steel	Acrylic	> 90
ASD-LFMDR-18D28CC-BZ	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	2 kV	Steel	Acrylic	> 90
ASD-LFMDR-18D28CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
LFMDR-MV 120-277V								
ASD-LFMDR-MV-12D20CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-MV-14D21CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-MV-16D24CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-MV-18D28CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
LFMDR-EM WITH BATTERY BACK-UP 120-277V								
ASD-LFMDR-MV-12D20CC-EM-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-MV-14D21CC-EM-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMDR-MV-16D24CC-EM-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
FMOV 120V								
ASD-FMOV-24D38NK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	1 kV	Metal	PC	> 80
ASD-FMOV-24D38BK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	128°	1 kV	Metal	PC	> 80
ASD-FMOV-32D50NK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	1 kV	Metal	PC	> 80
ASD-FMOV-32D50BZ	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	1 kV	Metal	PC	> 80
ASD-FMOV-32D50BK	Damp location	-4°F to 104°F (-20°C to 40°C)	> 0.9	120°	1 kV	Metal	PC	> 80
LFMOV-MV 120-277V								
ASD-LFMOV-MV-32D45CC-NK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMOV-MV-32D45CC-BZ	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80
ASD-LFMOV-MV-32D45CC-BK	Damp location	-4°F to 113°F (-20°C to 45°C)	> 0.9	120°	1 kV	Steel	Acrylic	> 80

DIMMING COMPATIBLE CONTROLS:

Brand	Lutron		Leviton		for FMOV models				
					Lutron		Leviton		
Models	MACL-153MLH-WH	DVCL-153PR	R02-DW6HD-2RW	R68-06674-POT	CTCL-153PDH-WH-C	S-600H-WH-CSA	DVELV-300P	DVRF-6L	RDL06
	STCL-153PH-WH	P-PKG1W	R00-RNL06-0TW	DSL06	DVCL-153PR-WH	PWCL-153PH	MACL-153M		
	PD-6WCL-WH-R								


PACKAGE CONTENTS LFMDR:

Description	Quantity
LED Double Ring Flushmount	1
Wire nut (A)	3
Screw (B)	2
Box	1




PACKAGE CONTENTS FMOV:

Description	Quantity
LED Oval Double Ring Flushmount	1
Wire nut (A)	3
Fixture screw (B)	2
Self-taping screw (C)	4
Anchor (D)	4
Box	1



PACKAGE CONTENTS LFMOV:

Description	Quantity
LED Oval Double Ring Flushmount	1
Mounting plate (A)	1
Template (B)	1
Screw (C)	4
Self-taping screw (D)	4
Wire nut (E)	3
Anchor (F)	4
Box	1

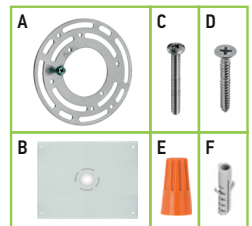

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED DOUBLE RING FLUSHMOUNT

LFMDR series

BUILT-IN BATTERY BACK-UP INFORMATION

Model	Battery watts	Lumens in emergency mode	Battery capacity	Emergency mode	Charging time
ASD-LFMDR-MV-12D20CC-EM-NK	12 W	1000 lm	2,200 mAh	> 90 min	8 hours
ASD-LFMDR-MV-14D21CC-EM-NK	12 W	826 lm	2,200 mAh	> 90 min	8 hours
ASD-LFMDR-MV-16D24CC-EM-NK	12 W	826 lm	2,200 mAh	> 90 min	8 hours


Operating condition	Charging	Emergency mode	Test switch
 ON	 Blinking	 OFF	

- Indicator light is ON: Battery back-up fully charged and device is using circuit power.
- Indicator light is Blinking: Battery back-up recharging and device is using circuit power.
- Indicator light is OFF: Device is using battery back-up power.
- In order to test the battery back-up press the test switch one time. To turn off the emergency power state press test switch one more time.

Specifications	
Input voltage	100-277 V 50/60 Hz
AC Input current	max 110 mA
AC Input power rating	max 5.0W
Output current (voltage)	200 mA (20-36 Vdc) 360 mA (20-36 Vdc)
Output power	6 W 12W
Lumens	400 lm 800 lm
Emergency time	min 90 minutes
Indicator light	Illuminated test switch
Battery	Li-ion battery - 11.1 V/2200 mAh
Battery charging current	440 mA
Charging time	8 hours
Temperature rating (Ambient)	32°F to 113°F (0°C to 45°C)
Warranty	5 years

INSTALLATION STEPS LFMDR:

- Unscrew three cap nuts counter-clockwise, remove the metal ring and the lens.
- Attach two screws to the outlet box. Connect the wires: Black to Black, White to White, Ground to Ground. Carefully tuck all the wires back into the outlet box.
- Place the fixture pan over the outlet box and feed fixture screws through keyhole slots. Rotate the fixture pan clockwise until screws lock into the narrow end of the keyhole slots and tighten screws firmly. Choose either 3,000K, 4,000K or 5,000K with a simple switch. Secure the lens and the metal ring to the fixture pan using three cap nuts.

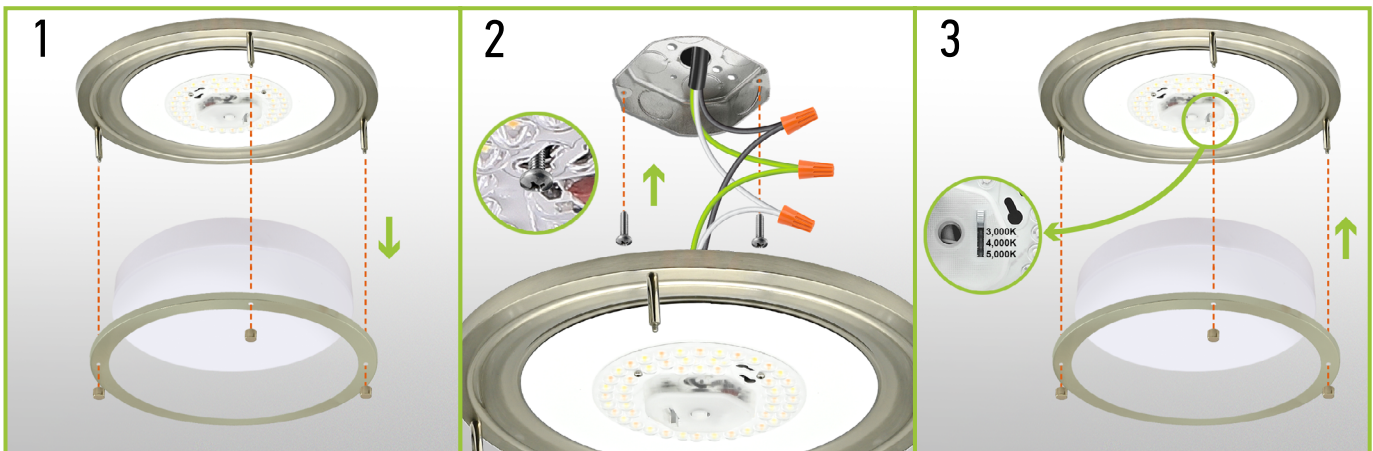

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation!

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

⚠ WARNING

Risk of personal injury – read and follow all warnings and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com






LED DOUBLE RING FLUSHMOUNT

LFMDR series

INSTALLATION STEPS LFMDR-EM WITH BATTERY BACK-UP:

1. Unscrew three cap nuts counter-clockwise, remove the metal ring and the lens.
2. Attach two screws to the outlet box. Connect the wires: Black to Black, White to White, Ground to Ground. Carefully tuck all the wires back into the outlet box. Connect the LED Emergency controller to the battery back-up.
3. Place the fixture pan over the outlet box and feed fixture screws through keyhole slots. Rotate the fixture pan clockwise until screws lock into the narrow end of the keyhole slots and tighten screws firmly. Choose either 3,000K, 4,000K or 5,000K with a simple switch. Secure the lens and the metal ring to the fixture pan using three cap nuts.

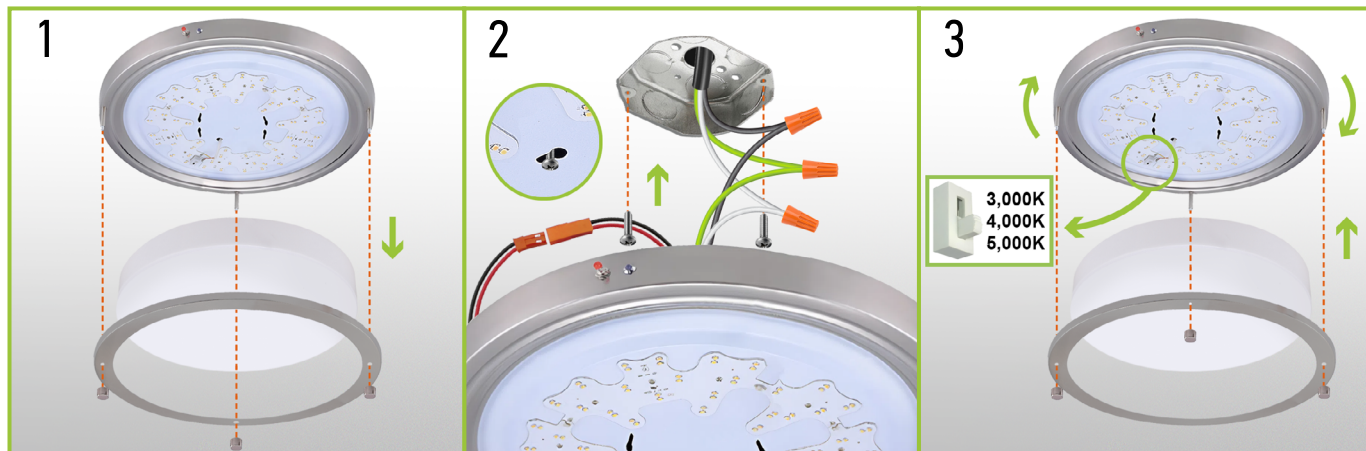

ORDERING INFORMATION

Model	Product dimensions	Weight	Pcs. per carton	Carton size	Carton weight	UPC	GTIN 14
LFMDR 120V							
ASD-LFMDR-10D16CC-NK	10-5/16" x 10-5/16" x 3-1/2"	1.3 lbs (0.6 kg)	4	16.3" x 12" x 12.2"	9.9 lbs	81005073170	10810050731703
ASD-LFMDR-10D16CC-BK	10-5/16" x 10-5/16" x 3-1/2"	1.3 lbs (0.6 kg)	4	16.3" x 12" x 12.2"	9.9 lbs	81012811770	10810128117705
ASD-LFMDR-12D20CC-NK	11-13/16" x 11-13/16" x 2-9/16"	1.7 lbs (0.7 kg)	4	13.8" x 13.4" x 14"	11.1 lbs	81005073573	10810050735732
ASD-LFMDR-12D20CC-BK	11-13/16" x 11-13/16" x 2-9/16"	1.7 lbs (0.7 kg)	4	13.8" x 13.4" x 14"	11.1 lbs	81012811166	10810128111666
ASD-LFMDR-14D21CC-NK	13-3/4" x 13-3/4" x 2-9/16"	2.2 lbs (1 kg)	4	15.8" x 13.4" x 15.9"	13.9 lbs	81005073608	10810050736081
ASD-LFMDR-14D21CC-BK	13-3/4" x 13-3/4" x 2-9/16"	2.2 lbs (1 kg)	4	15.8" x 13.4" x 15.9"	13.9 lbs	81012811167	10810128111673
ASD-LFMDR-16D24CC-NK	15-15/16" x 15-15/16" x 3-1/4"	2.2 lbs (1 kg)	2	17.3" x 8.2" x 17.3"	8.4 lbs	81005073610	20810050736101
ASD-LFMDR-16D24CC-BZ	15-15/16" x 15-15/16" x 3-1/4"	2.2 lbs (1 kg)	2	17.3" x 8.2" x 17.3"	8.4 lbs	81005073611	20810050736118
ASD-LFMDR-16D24CC-BK	15-3/4" x 15-3/4" x 3-3/4"	3.0 lbs (1.4 kg)	2	17.7" x 8.7" x 17.7"	10.3 lbs	81012811168	20810128111687
ASD-LFMDR-18D28CC-NK	17-15/16" x 17-15/16" x 3-7/8"	3.1 lbs (1.4 kg)	2	19.3" x 9.4" x 19.3"	10.8 lbs	81005073555	20810050735555
ASD-LFMDR-18D28CC-BZ	17-15/16" x 17-15/16" x 3-7/8"	3.1 lbs (1.4 kg)	2	19.3" x 9.4" x 19.3"	10.8 lbs	81005073594	20810050735944
ASD-LFMDR-18D28CC-BK	17-11/16" x 17-11/16" x 4-1/16"	4.3 lbs (2 kg)	2	20.1" x 9.5" x 20.1"	13.9 lbs	81012811169	20810128111694
LFMDR-MV 120-277V							
ASD-LFMDR-MV-12D20CC-NK	11-13/16" x 11-13/16" x 3-1/8"	1.6 lbs (0.7 kg)	4	15.6" x 13.2" x 13.4"	11.6 lbs	81005073282	10810050732823
ASD-LFMDR-MV-14D21CC-NK	14" x 14" x 3-9/16"	2.5 lbs (1.1 kg)	4	15.9" x 15.7" x 15.9"	16.4 lbs	81920102792	10819201027924
ASD-LFMDR-MV-16D24CC-NK	15-3/4" x 15-3/4" x 3-13/16"	3.0 lbs (1.4 kg)	2	17.7" x 8.7" x 17.7"	10.3 lbs	81005073058	20810050730581
ASD-LFMDR-MV-18D28CC-NK	17-11/16" x 17-11/16" x 4-1/16"	4.3 lbs (2.0 kg)	2	20.1" x 9.5" x 20.1"	14 lbs	81005073040	20810050730406
LFMDR-EM WITH BATTERY BACK-UP 120-277V							
ASD-LFMDR-MV-12D20CC-EM-NK	11-13/16" x 11-13/16" x 4-5/16"	2.4 lbs (1.1 kg)	4	22.1" x 13.6" x 13.6"	19 lbs	81012811253	10810128112533
ASD-LFMDR-MV-14D21CC-EM-NK	13-3/4" x 13-3/4" x 4-11/16"	4.1 lbs (1.9 kg)	4	15.9" x 15.9" x 22"	24.2 lbs	81920102799	10819201027993
ASD-LFMDR-MV-16D24CC-EM-NK	15-3/4" x 15-3/4" x 4-3/4"	4.9 lbs (2.2 kg)	4	23.4" x 17.9" x 17.9"	31.3 lbs	81920102800	10819201028006
FMOV 120V							
ASD-FMOV-24D38NK	24" x 13-9/16" x 4-5/16"	1.7 lbs (0.8 kg)	2	26.4" x 15.4" x 12.2"	6.3 lbs	81012811379	10810128113790
ASD-FMOV-24D38BK	24" x 13-9/16" x 4-15/16"	4.3 lbs (1.9 kg)	2	27" x 12.2" x 16.7"	16.6 lbs	81012811380	10810128113806
ASD-FMOV-32D50NK	32-5/16" x 18-1/8" x 4-5/16"	3.1 lbs (1.4 kg)	2	34.7" x 19.9" x 12.2"	9.7 lbs	81012811381	10810128113813
ASD-FMOV-32D50BZ	32-5/16" x 18-1/8" x 4-5/16"	3.1 lbs (1.4 kg)	2	34.7" x 19.9" x 12.2"	9.7 lbs	81019020053	10810190200534
ASD-FMOV-32D50BK	32-5/16" x 18-1/8" x 4-5/16"	3.1 lbs (1.4 kg)	2	34.7" x 19.9" x 12.2"	9.7 lbs	81012811382	10810128113820
LFMOV-MV 120-277V							
ASD-LFMOV-MV-32D45CC-NK	32-7/16" x 18-1/8" x 4-13/16"	6.9 lbs (3.1 kg)	2	35.2" x 11.8" x 21.5"	21.3 lbs	81005073205	20810050732059
ASD-LFMOV-MV-32D45CC-BZ	32-7/16" x 18-1/8" x 4-13/16"	6.9 lbs (3.1 kg)	2	35.2" x 11.8" x 21.5"	21.3 lbs	81005073256	10810050732564
ASD-LFMOV-MV-32D45CC-BK	32-7/16" x 18-1/8" x 4-13/16"	6.9 lbs (3.1 kg)	2	35.2" x 11.8" x 21.5"	21.3 lbs	81012811170	10810128111703

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com

