



Type IC, Air-Tight, Wet & Plenum

DESCRIPTION

6" Round Recessed LED With Built-In Driver
Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

- 2 1/4" Deep - Install Where Ceiling Space Is Limited
- Type IC Rated - No Housing Required
- CRI 90+ for True Color Rendering
- Fast & Easy To Install - Save On Labor
- Connection Box Included - No Junction Box Needed
- Armored Cable - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2 1/4"

DIMENSIONS: ID 6" OD 7" Cut Out 6" to 6 1/2"

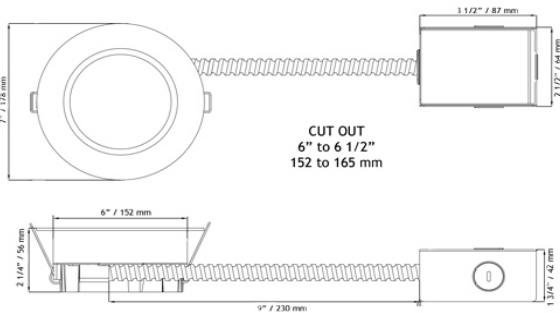

AVAILABLE TRIMS



White

Black

ORDERING GUIDE Example: LL6RRG - 30K - WH

	CCT	Trim Finish	
LL6RRG	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4100K	41K		

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDlights.com

LL6RRG

6" Round Regressed 1st Gen Plenum LED 17W

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	17 W
Color Temperature	2700 3000 4100
Light Output	1000 1020 1050
Halogen Equivalent	100 W
Beam Angle	90°
CRI	90 +
Input Voltage	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 5%-100%
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

ACCESSORIES Sold Separately



26" Flat Rough-In Plates - cat # **RIP6**



13" Flat Rough-In Plate - cat # **MP6-2**



Flanged Plate with Hanger Bars - cat # **FRP6**



Goof Ring White OD 7 5/8" cat # **GR6**

COMPLIANCE



**Type IC
Air-Tight
Open Plenum**

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090
Delta BC & Mississauga ON