


Straight Square Steel Poles

Size: 4" (4" x 4"), 5" (5" x 5")

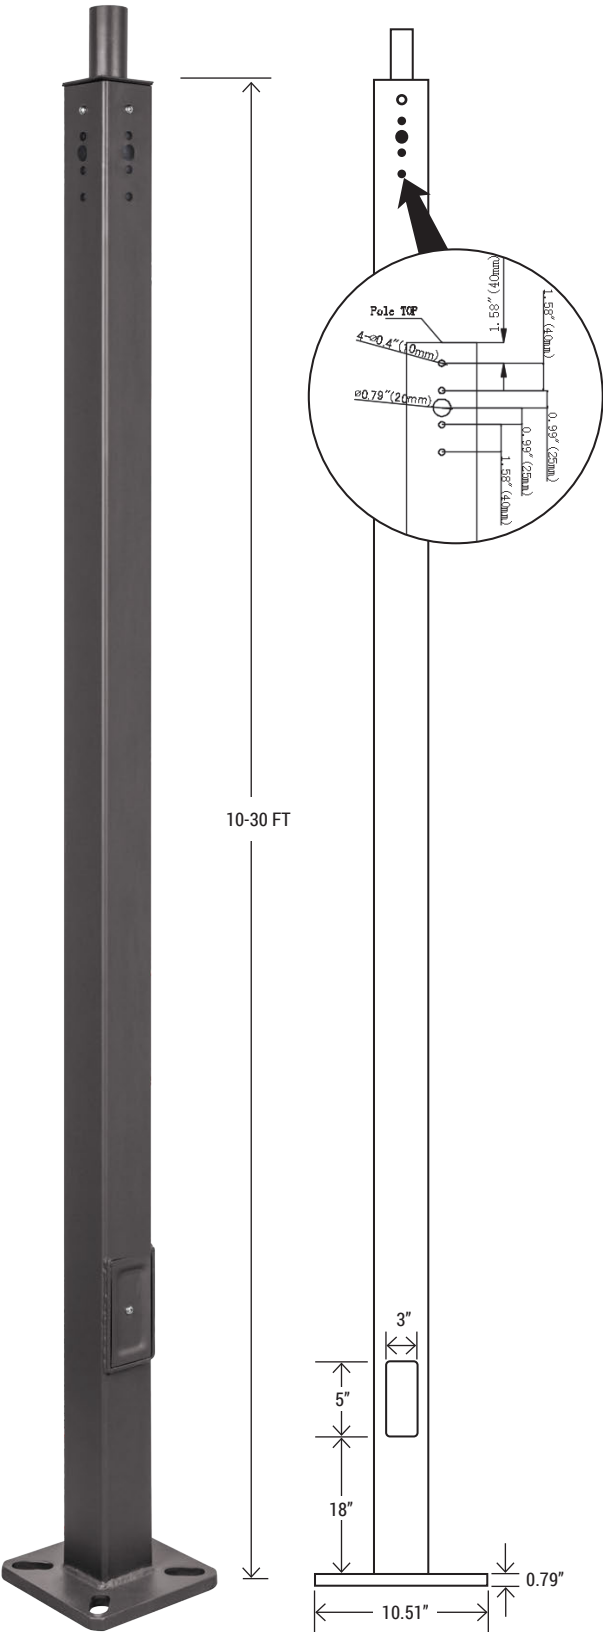

This Series Straight Square Steel poles are built from high strength steel tube and are available side drilled for arm mounted area lighting luminaires or with tenon mounts for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 10 to 30 feet can be used based on selected luminaire application.

(ACCESSORIES NEED TO PURCHASED SEPARATELY)

FEATURES

FINISH:

Textured architectural bronze powder-coat finish, baked to ensure maximum paint adhesion, hardness and durability.

ANCHOR BOLTS:

Anchor bolts are not included, sized based on pole data charts for the selected pole size.

HAND HOLE:

Cast iron reinforced hand hole and cover with ground screw.

BASE COVER:

Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base.

POLE LENGTH:

Poles are available in standard lengths as shown in the order matrix. Poles can be custom cut to order. Consult factory.

SURFACE TREATMENT: Hot-dip galvanizing.

SPECIFICATIONS: Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46,000 PSI.

SPECIFICATION	10FT	15FT	20FT	25FT	30FT
10FT4-11G-D-T	L = 3.0 (m)	L = 4.6 (m)	L = 6.1 (m)	L = 7.6 (m)	L = 9.1 (m)
15FT4-11G-D-T					
20FT4-11G-D-T					
25FT4-11G-D-T					
30FT5-11G-D-T					

MOUNTING OPTIONS



SIDE MOUNT: Standard length poles are predrilled holes on 4 side, with a Tenon standard packaged on top. Also with hole plugs for unused predrilled locations.


Note: When using Arm or Slip-Fitter Mounts, additional installation parts may be required to ensure proper installation. (example: with Slip-fitter a bullhorn will be the option) [see: additional installation parts for more options](#)

TOP MOUNT: Installing ARM (optional) will need to take-off the Tenon standard package and put rain cover on top.

Straight Square Steel Poles


Size: 4" (4" x 4"), 5" (5" x 5")

DIMENSION

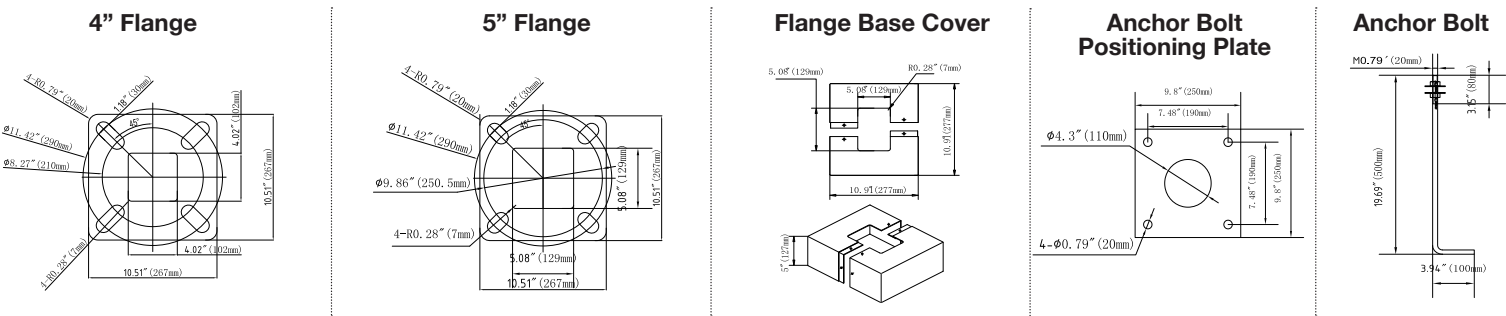

DIMENSION DATA

CATALOG	HEIGHT	GAUGE	SIZE	BASE	BOLT CIRCLE	BOLT SIZE	WEIGHT (LBS)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120
10FT4-11G-D-T	10ft	11	4"x4"	11"	8.27"-11.42"	M0.79"x19.69"x3.94"	101	25.2	23.5	20.3	19.4	17.3	15.6
15FT4-11G-D-T	15ft						134	15.2	13.5	11.1	9.5	7.9	6.8
20FT4-11G-D-T	20ft						169	10.2	9.3	7.5	6.2	4.2	3.6
25FT4-11G-D-T	25ft						190	8.9	6.9	5.7	4.1	3.6	2.2
30FT5-11G-D-T	30ft		5"x5"		9.86"-11.42"	M0.79"x19.69"x3.94"/ M0.95"x36"x4"	286	9.6	7.4	6.1	5.8	4.6	3.8

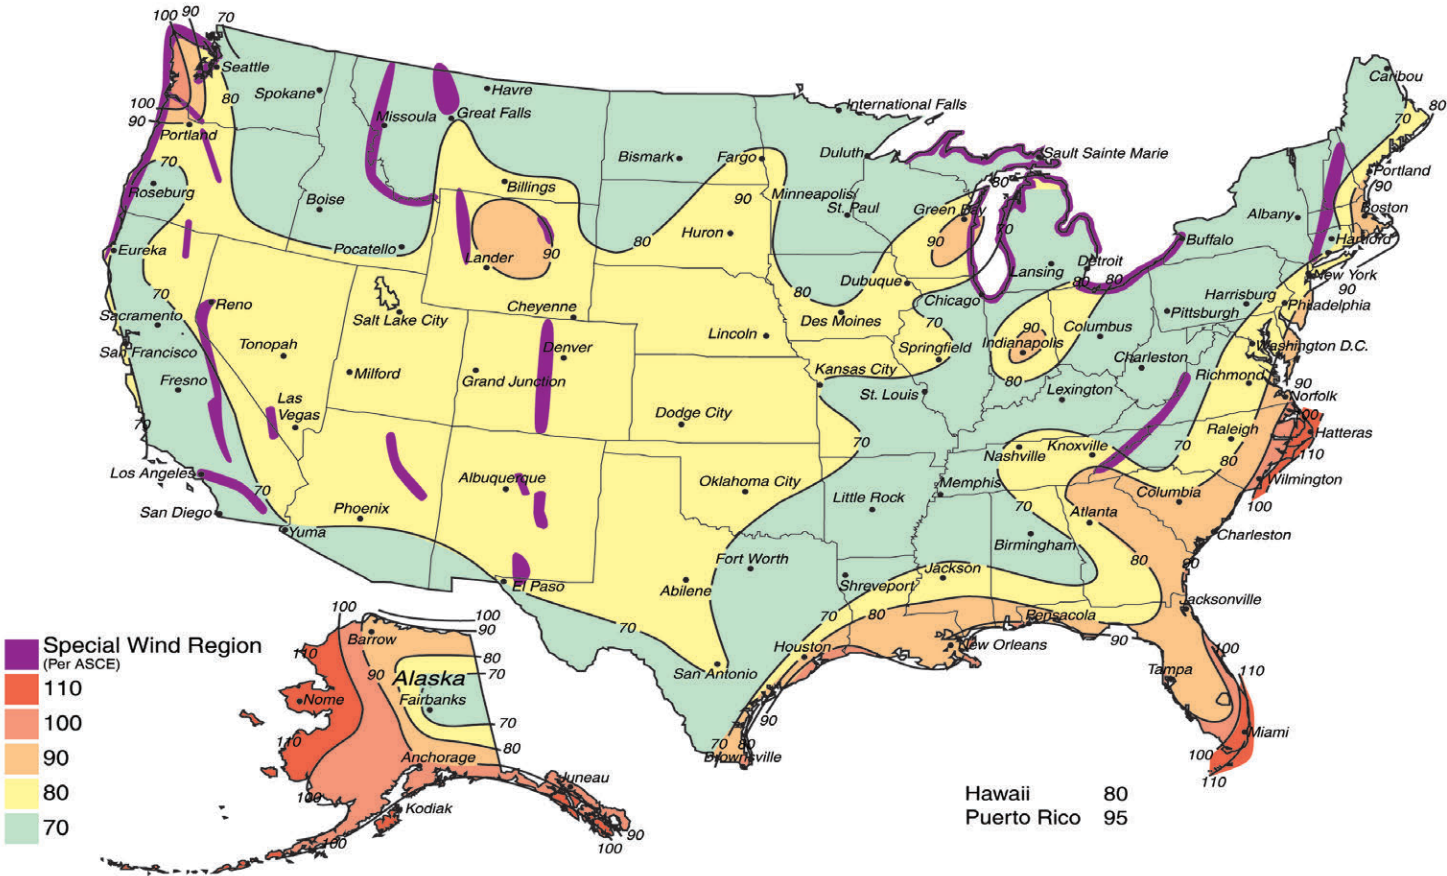

Straight Square Steel Poles









Size: 4" (4" x 4"), 5" (5" x 5")

ORDERING INFORMATION


EXAMPLE: 10FT4-11G-D-T

10FT	4	11G	D	T
HEIGHT	SIZE	THICKNESS	FINISH	MOUNTING
10FT - (3.0 M) 15FT - (4.6 M) 20FT - (6.1 M) 25FT - (7.6 M) 30FT - (9.1 M)	4 - (4" x 4") 5 - (5" x 5")	11G - (11 gauge)	D - (Dark Bronze)	T - (2.5" Adapter)


FIXTURE CONFIGURATIONS

							
Single	D90	DN90	D180	T90	TN120	QN90	Q90

INSTALLATION

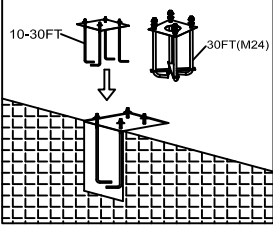


1. Dig a hole in the installation position of the lamp pole. Fixed four fastener fittings according to the hole position of lamp pole and poured with cement concrete. (as shown in the figure)

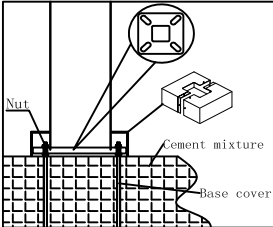


2. Install 4 screws onto the stick and adjust to same water level, then place the square plate and screw tightly. Install the cover at the bottom of pole. (as shown in the figure)

Foundation reference specification



Reference design of Concrete size			
Specifications	L	W	H
10-15FT	31.5"(800mm)	31.5"(800mm)	59.1"(1500mm)
20-25FT	35.4"(900mm)	35.4"(900mm)	70.9"(1800mm)
30FT	35.4"(900mm)	35.4"(900mm)	82.7"(2100mm)

ANCHORAGE GUIDE

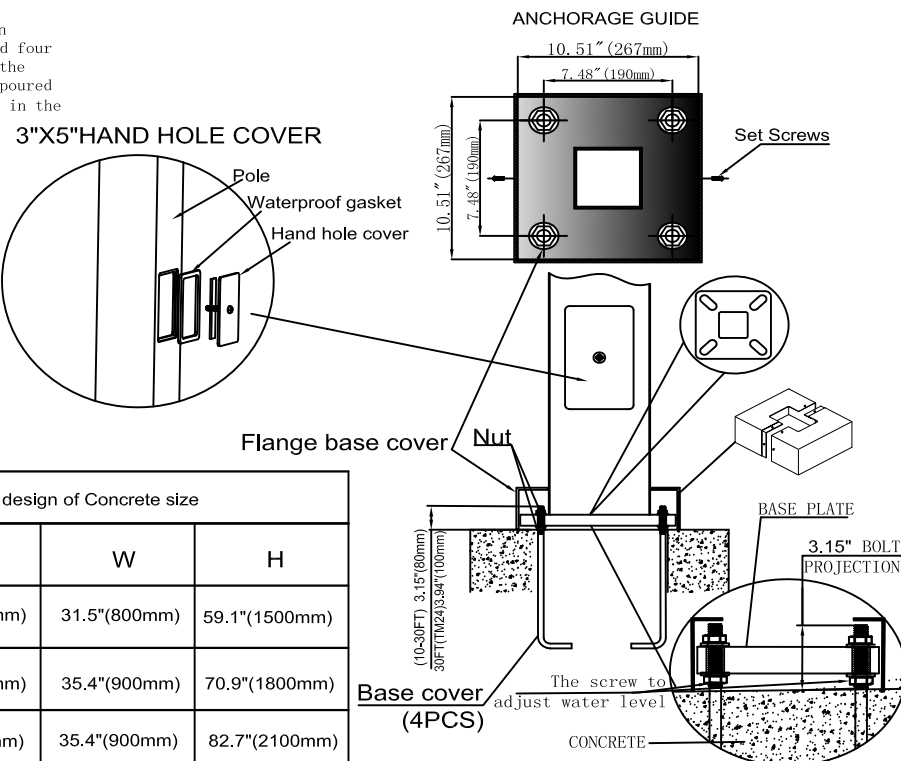

3"X5" HAND HOLE COVER

Flange base cover

Base cover (4PCS)

CONCRETE

3.15" BOLT PROJECTION

The screw to adjust water level

Set Screws

Nut

BASE PLATE

10.51" (267mm)

7.48" (190mm)

10.51" (267mm)

7.48" (190mm)

Waterproof gasket

Hand hole cover

Pole

10-30FT

30FT(M24)

Foundation Design:We offer Foundation design references due to variations in soil structure across different areas, and we do not assume any responsibility for this variability.

Straight Square Steel Poles

Size: 4" (4" x 4"), 5" (5" x 5")


SQUARE EXTERNAL MOUNT HORIZONTAL TENON		• To mount 2/3/4 fixtures on an existing pole	
	Low Profile Bullhorn with 3 Tenons VTS4R-3T-D MAX EPA: 1.6 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.		Low Profile Bullhorn with 2 Tenons VTS4R-2T-D MAX EPA: 1.0 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.
	Triple 120° Horizontal Tenon Adapter QT120-3T-D MAX EPA: 1.4 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.		Quad 90° Horizontal Tenon Adapter QT90-4T-D MAX EPA: 1.6 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.
WALL BRACKET • Attaches to any flat surface • Provides wiring access		MID-POLE TENON BRACKET	
	90° Wall Mount Bracket with 2-3/8" O.D. Tenon ADP2.5-90-D MAX EPA: 0.6 Finish: Dark Bronze The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting.		2-3/8" OD Horizontal Tenon Mid-Pole Bracket ADP2.5-D MAX EPA: 0.3 Finish: Dark Bronze 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slip-fitter onto a 2-3/8" OD horizontal tenon.
	180° Wall Mount Bracket with 2-3/8" O.D. Tenon ADP2.5-180L3.9-D MAX EPA: 0.5 Finish: Dark Bronze The 180° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting.		2-3/8" OD Horizontal Tenon Arc Adapter ADP2.5-BAR5-D MAX EPA: 0.3 Finish: Dark Bronze For use with Round, non-tapered steel and aluminum poles. 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slip-fitter onto a 2-3/8" OD horizontal tenon.
POLE BRACKET • For mounting one fixture on an existing pole			
	4" Square Pole Mount with 2-3/8" O.D. Tenon VTS4-D MAX EPA: 0.3 Finish: Dark Bronze For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D. and is made of steel tubing.		3" Round Pole Mount with 2-3/8" O.D. Tenon VT3-D MAX EPA: 0.3 Finish: Dark Bronze For use with round, non-tapered steel and aluminum poles. Furnished with four 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D.
	5" Square Pole Mount with 2-3/8" O.D. Tenon VTS5-D MAX EPA: 0.3 Finish: Dark Bronze For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing.		4" Round Pole Mount with 2-3/8" O.D. Tenon VT4-D MAX EPA: 0.3 Finish: Dark Bronze For use with round, non-tapered steel and aluminum poles. Furnished with four 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D.
	5" Round Pole Mount with 2-3/8" O.D. Tenon VT5-D MAX EPA: 0.3 Finish: Dark Bronze For use with round, non-tapered steel and aluminum poles. Furnished with four 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing.		

Straight Square Steel Poles


Size: 4" (4" x 4"), 5" (5" x 5")

ROUND EXTERNAL MOUNT HORIZONTAL TENON


To mount 2/3/4 fixtures on an existing pole




Double 90° Horizontal Tenon Adapter
SB2.5TW90-D
MAX EPA: 0.6
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.



Triple 120° Horizontal Tenon Adapter
SB2.5TR120-D
MAX EPA: 0.7
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




Double 180° Horizontal Tenon Adapter
SB2.5TW180-D
MAX EPA: 0.4
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




Quad 90° Horizontal Tenon Adapter
SB2.5QD90-D
MAX EPA: 0.3
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




Single Spoke Bracket Tenon Adapter
SB2.5S90-D
MAX EPA: 0.4
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. One fixture can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.



180° Double Bullhorn
RB2.5D180-D
MAX EPA: 0.9
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




180° Triple Bullhorn
RB2.5TR180-D
MAX EPA: 1.4
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




90° Quad Bullhorn
RB2.5QD90-D
MAX EPA: 1.5
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.




90° Wall Mount Bracket with 2-3/8" O.D. Tenon
ADP2.5-90H-D
MAX EPA: 0.7
Finish: Dark Bronze
The 90° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and abuilt-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.



Double 180° Horizontal Tenon Adapter
RB2.5TR180H-D
MAX EPA: 1.0
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.



Triple 120° Horizontal Tenon Adapter
SB2.5TR120V-D
MAX EPA: 1.5
Finish: Dark Bronze
The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.



Double 180° Wall Mount Bracket with 2-3/8" O.D. Tenon
ADP2.5-180H-D
MAX EPA: 1.4
Finish: Dark Bronze
The 180° wall mount bracket with 2-3/8" tenon attaches flood and area fixtures to almost any surface: wall, roof, or wood pole. Provides wiring access and abuilt-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slip-fitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.

Straight Square Steel Poles

Size: 4" (4" x 4"), 5" (5" x 5")

	<p>Square Triple 90° Horizontal Tenon Adapter QT90-3T-D MAX EPA: 1.5 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.</p>		<p>Round Triple 90° Horizontal Tenon Adapter SB2.5QD90-3T-D MAX EPA: 0.3 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Triple fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
	<p>Low Profile Bullhorn with 4 Tenons VTS4R-4T-D MAX EPA: 1.7 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" O.D. vertical tenon.</p>		<p>Four 180° Horizontal Tenon Adapter RB2.5TR180-4T-D MAX EPA: 1.4 Finish: Dark Bronze The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally.</p>
<p>MOUNTING OPTIONS:</p>			
	<p>NEWSBARM2-D Finish: Dark Bronze Arm Mount 4" and 5" Square and Round poles. Standard versatile mounting arm is simple to install and can be used with existing poles for retro installations.</p>		<p>NEWSBSF2-D Finish: Dark Bronze Slipfit Mount An optional cast aluminum mast arm adapter secures fixture head to nominal 2" (2-3/8" O.D. pipe size) horizontal steel tenon arm.</p>
	<p>SBT-D Finish: Dark Bronze Easy to install for direct wall mounting with 1/2" conduit wiring.</p>		<p>SFARM2-D Finish: Dark Bronze SFARM2 Mount An optional cast aluminum mast arm adapter secures fixture head to nominal 2" (2-3/8" O.D. pipe size) horizontal steel tenon arm.</p>
	<p>Arm Square Tube Turn Tube Tenon Adapter ARM-BAR-D Finish: Dark Bronze Round tube light bar installation, with Arm installation of lamps.</p>		<p>Arm Square Tube Turn Tube Tenon Adapter SADP-BAR-D Finish: Dark Bronze Round tube light bar installation, with Arm installation of lamps.</p>
	<p>Install Base Shield IBS4-D Finish: Dark Bronze The 4" Installation of base shield is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.</p>		<p>Install Base Shield IBS5-D Finish: Dark Bronze The 5" Installation of base shield is used to protect the base after fixing the lamp pole, so that the lamp pole base is not damaged, thereby increasing the service life of the lamp pole.</p>

Straight Square Steel Poles

Size: 4" (4" x 4"), 5" (5" x 5")

MOUNTING OPTIONS:			
	<p>Anchor Bolt Positioning Plate SPP-D</p> <p>This is a screw rod positioning plate. After the screw rod of the lamp rod base is fixed underground, the positioning plate is fixed with the screw rod to prevent the screw rod from deviating. Finally, the lamp rod is locked.</p>		<p>Anchor Bolt BMS-S</p> <p>Before installing the lamp pole, the installation hook should be buried underground and fixed by cement. After fixing, the lamp pole should be fixed by locking screw and base installed.</p>
30FT Light Pole Optional Accessories:			
	<p>Cross Screw Positioning Plate SPP250-BM24</p> <p>This is a screw bottom cross positioning plate. It is used in conjunction with the top positioning plate SPP250-TM24 and BM24SL914-S to fix the positioning plate with the screw to prevent the screw from deviating. Finally, the lamp pole locks.</p>		<p>Anchor Bolt Positioning Plate SPP250-TM24</p> <p>This is a screw rod positioning plate. After the screw rod of the lamp rod base is fixed underground, the positioning plate is fixed with the screw rod to prevent the screw rod from deviating. Finally, the lamp rod is locked. (It is used in conjunction with SPP250-BM24 and BM24SL914-S).</p>
	<p>Anchor Bolt BM24SL914-S</p> <p>Before installing the lamp pole, the installation hook should be buried underground and fixed by cement. After fixing, the lamp pole should be fixed by locking screw and base installed. (It is used in conjunction with SPP250-BM24 and SPP250-TM24).</p>		
LIGHT POLE TOP			
<p>PRE-DRILL MOUNT OPTIONS</p>			<p>TENON MOUNT INCLUDED ON TOP</p>