


400 Lumens/Ft. Lighted Power Strip

Built-in power supply, single-white lighting, 20-amp single receptacles



24" fixture shown in Satin Nickel
with Grey receptacles
LP24QD8NDGSN30

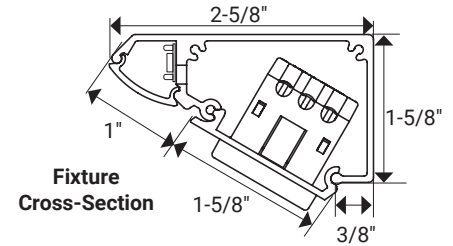

120V Ordering Information

Kelvin Temperature	Length	Total Lumens	Total Watts	Number of Receptacles	Part Number
2700K, 3000K, 4000K, 5000K	10-1/2" (267 mm)	333	3	1	LP10QD2NDColorFinishTemp
2700K, 3000K, 4000K, 5000K	12-1/2" (317 mm)	400	4	2	LP12QD4NDColorFinishTemp
2700K, 3000K, 4000K, 5000K	18-1/2" (470 mm)	600	6	2	LP18QD6NDColorFinishTemp
2700K, 3000K, 4000K, 5000K	24-1/2" (622 mm)	800	8	4	LP24QD8NDColorFinishTemp
2700K, 3000K, 4000K, 5000K	30-1/2" (775 mm)	1000	10	4	LP30QD10NDColorFinishTemp
2700K, 3000K, 4000K, 5000K	36-1/2" (927 mm)	1200	12	4	LP36QD12NDColorFinishTemp

Blue indicates dealer choice: Color indicates receptacle color, Finish indicates fixture finish color, and Temp indicates Kelvin temperature
LP10QD2NDGSN30 (Example part number for LPS DV Series, with Grey receptacles, Satin Nickel finish in 3000K Kelvin temperature)

ABOUT THE PRODUCT

- Low profile: 1-5/8"
- Built-in power supply—direct replacement for a stand-alone fluorescent light
- Available in standard lengths only
- Dimming requires a dedicated circuit for the lighting—do not wire to dim receptacles
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- No Ultraviolet (UV) or Infrared (IR)
- Compatible with electronic low voltage dimmer
- 50,000 hour LED life at 70% lumen maintenance
- UL listed

APPLICATIONS


Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

RECEPTACLE COLOR AND COORDINATING FINISH



TECHNICAL INFORMATION

Input Voltage	120-volts
Amps	20-amp receptacles
Color Temperature (Kelvin)	Warm White 2700K (27) Soft White 3000K (30) Cool White 4000K (40) Daylight White 5000K (50)
CRI (Color Rendering Index)	90+
LED Type	SMD 2835
Lumens	400 lumens per foot
Max Run	Maximum recommended run length is 16 ft. for single-sided powering
Dimmable	5%–100%
Rating	cULus Listed
Rated Life	50,000 hrs
LED Beam Angle	120°
LED Spacing	1/4"
Mounting	Wood screws and wall anchors (included)
Amps	20 amps
Wiring	12 gauge Romex for receptacles 18–20 gauge wire for LEDs
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Environment	Dry locations
Construction Material	Powder coated aluminum, IR acrylic (lens)
Warranty	5 years

AVAILABLE KELVIN TEMPERATURES




LUMEN OUTPUT




HIGH

WITH BUILT-IN power supply and switch, high light output, 4-watts per foot


36-1/2" Fixture—LP36QD12NDColorFinishTemp

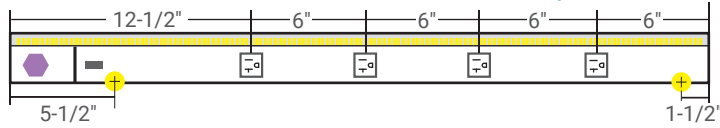


30-1/2" Fixture—LP30QD10NDColorFinishTemp

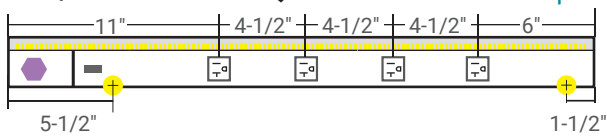


24-1/2" Fixture—LP24QD8NDColorFinishTemp

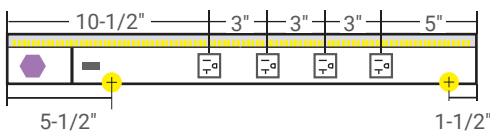


18-1/2" Fixture—LP18QD6NDColorFinishTemp

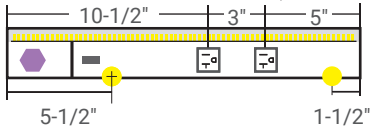

12-1/2" Fixture—LP12QD4NDColorFinishTemp



10-1/2" Fixture—LP10QD2ColorFinishTemp



LEGEND

-  = 20-amp receptacle available in Black (B), Grey (G), or White (W)
-  = Switch: 4-1/2" from left side; available in Black, Grey, or White
-  = Divider Plate: 3-1/2" from left side, low voltage
-  = Power Supply
-  = Knockout: 1-1/2" from right side, 5-1/2" from left side, located on back frame

