



# LL10R

## 10" Round Commercial Recessed LED 50W



**Type IC, Air-Tight & Wet**

### DESCRIPTION

10" Round Recessed LED With Integral Driver In Connection Box  
Commercial Grade Quality Built to Last


### FEATURES & BENEFITS

2 1/4" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
Fast & Easy To Install - Save On Labor  
Driver Inside Connection Box - No Junction Box Needed  
Wet Location IP65 Approved

### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2 1/4"

### DIMENSIONS: ID 10" OD 12" Cut Out 10" to 11"

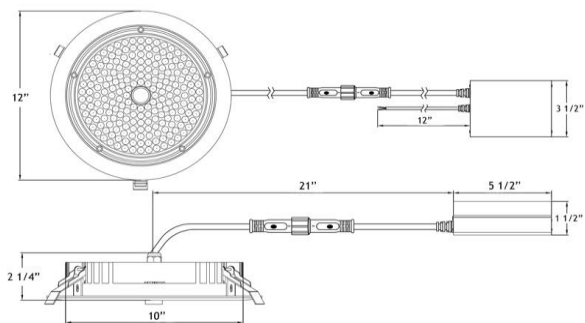

### 120V - 277V Driver Included 0-10V Dimmable



### ORDERING GUIDE

	CCT	Trim
LL10R-30K-WH	3000K	<a href="#">White</a>
LL10R-40K-WH	4000K	<a href="#">White</a>
LL10R-50K-WH	5000K	<a href="#">White</a>
LL10R-30K-BK	3000K	<a href="#">Black</a>
LL10R-40K-BK	4000K	<a href="#">Black</a>
LL10R-50K-BK	5000K	<a href="#">Black</a>

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	High Ceilings Recessed Mount
Energy Used	50 W
Color Temperature K	3000   4000   5000
Light Output lm	6500   6700   6830
Equivalent	100 W MH HPS
Beam Angle	60°
CRI	80
Default Driver Input	120V-277V AC 0-10V Dimmable
Optional Driver Input	347V AC 0-10V Dimmable
Power Factor	0.95
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceilings, Wet Locations
IP Rating	IP 65
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	5 Year

### AVAILABLE TRIMS



White



Black

### ACCESSORIES

Sold Separately



Low Voltage Extensions 6ft FT4 / CMR rated  
[model # BCX6](#)



Pendant Mount Kit model # **PMK810**  
Includes Aircraft Cable & 6ft Extension



347V Input Driver 0-10V Dimmable  
[model # LLL-LD50WH](#)



[Goof Ring Round White OD 14" model # GR10-14](#)  
[Goof Ring Round White OD 16" model # GR10-16](#)



[Goof Ring Square White OD 14" model # GS10-14](#)  
[Goof Ring Square White OD 16" model # GS10-16](#)

### COMPLIANCE



**Type IC**  
**Air-Tight**  
**Wet Location**

### Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

### Lotus LED Lights CANADA

1080 Cliveden Ave #6, Delta BC V3M 6J6 tel 604-538-3090  
Delta BC & Mississauga ON